

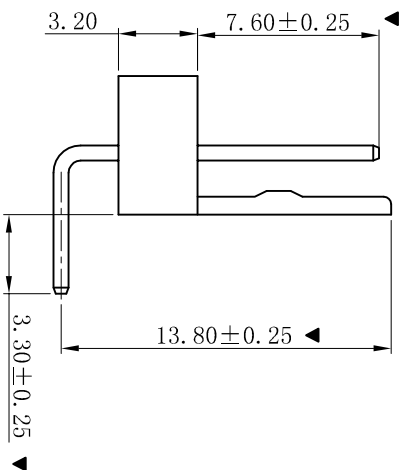
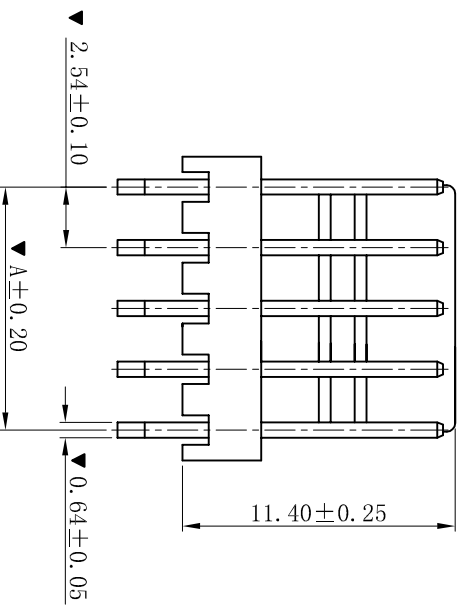


RoHS

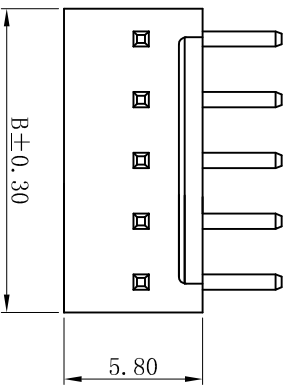

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2542RG-NP
- Poles : 02-20P
- Housing Material : PA66 UL94V-0
- Pin Material : Brass
- Contact Area Plating : Tin-Plated
- The Dimension Marked "▼" Must Be Recorded
PIN L=0.64x18.50

Poles	Dimension (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	日期/DATE	2019-06-03
C	修订版本	2015-11-04	陈雄军	绘图/DR	日期/DATE	2019-06-03
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	日期/DATE	2019-06-03
A	新版本	2011-05-24	陈雄军	核准/APPRO	日期/DATE	2019-06-03
H	说明		承认	审核/CHECK	日期/DATE	2019-06-03
	版次			核准/APPRO	日期/DATE	2019-06-03
	REV.			承认	日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	单位 Unit	比例/Scale	大小/Size	页码/SHEET	版本/Rev
第一角投影 1st Angle	MM	1:1	A4	1/1	D
品名 (PART NAME)	料号 (PART NO)				
2510 2.54mm 90° Wafer Connector Series			W2542RG-NP		
状态码	C				