

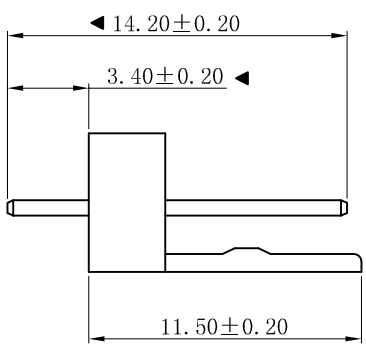
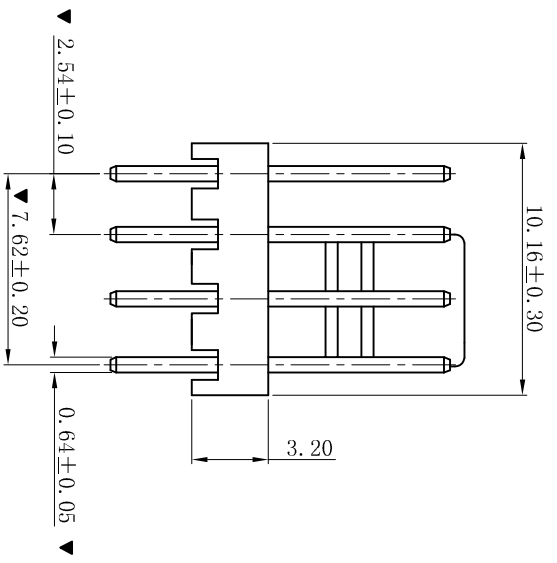


ROHS



P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No. : W2542V-04P-K3
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) 2510 2.54mm 180° Wafer Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR 陈雄军		比例/Scale 1:1		料号 (PART NO) W2542V-04P-K3	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK 陈雄军		大小/Size A4		状态码 C	
新版本		2011-05-24	陈雄军	批准/APPRO 胡进		页码/SHEET 1/1			
说明 DESCRIPTION		日期 DATE:	承认 APPRO.	日期/DATE		版本/Rev D			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----