

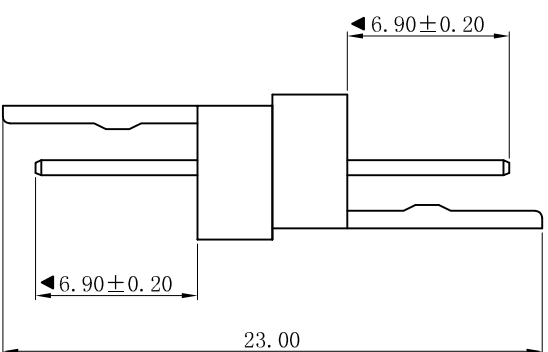
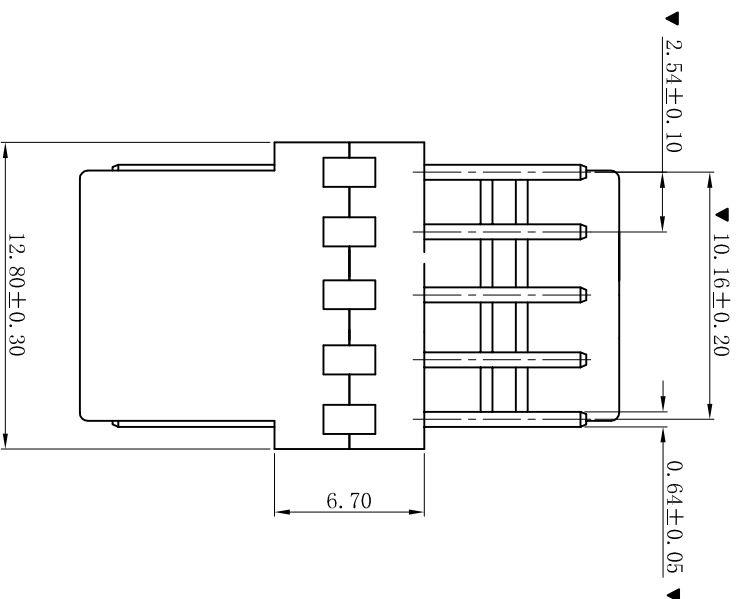


RoHS

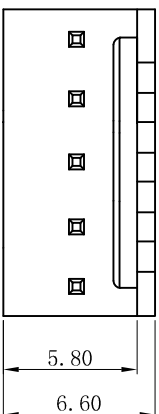

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2542VJ-05P
- Poles : 05P
- Housing Material : PA66 UL94V-0
- Pin Material : Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05 ANGLE: ±1°		投影法 Projection MM		品名 (PART NAME) 2510 2.54mm 180° Wafer Connector Series		料号 (PART NO) W2542VJ-05P		状态码 C
修訂版本		2015-11-04	陈雄军	绘图/DR 陈雄军		单位 Unit MM		大小/Scale 1:1				
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK 陈雄军		比例/Scale 1:1		页码/SHEET 1/1				
新版本		2011-05-24	陈雄军	批准/APPRO 胡进		页码/SHEET 1/1		版本/Rev D				
说明 DESCRIPTION		日期 DATE:	承认 APPRO.	日期/DATE		日期/DATE		日期/DATE				

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd