

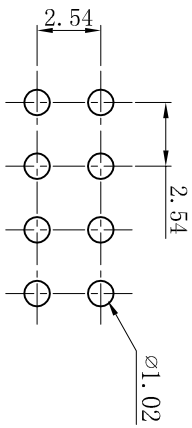
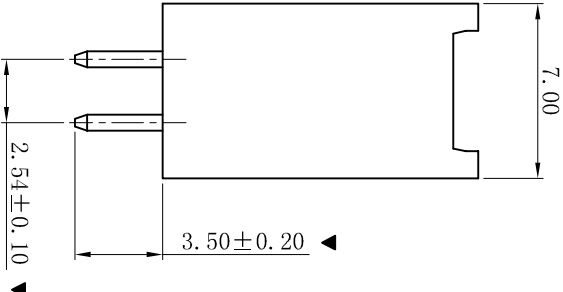
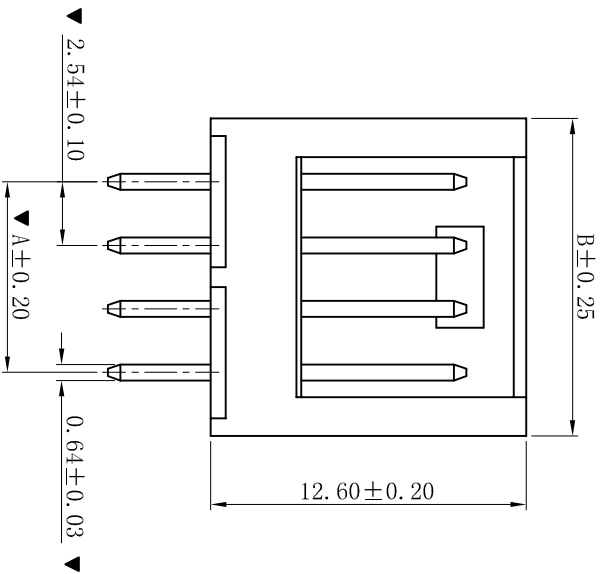


RoHS



P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W2543V-2xNP
  - Poles : 04-64P
  - Housing Material : PBT UL94V-0 Black
  - Pin Material : Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded



Poles	Dimensions (mm)		Poles		Dimensions (mm)		
	A	B	A	B	A	B	
2x02P	2.54	7.46	2x17P	40.64	45.56		
2x03P	5.08	10.00	2x18P	43.18	48.10		
2x04P	7.62	12.54	2x19P	45.72	50.64		
2x05P	10.16	15.08	2x20P	48.26	53.18		
2x06P	12.70	17.62	2x21P	50.80	55.72		
2x07P	15.24	20.16	2x22P	53.34	58.26		
2x08P	17.78	22.70	2x23P	55.88	60.80		
2x09P	20.32	25.24	2x24P	58.42	63.34		
2x10P	22.86	27.78	2x25P	60.96	65.88		
2x11P	25.40	30.32	2x26P	63.50	68.42		
2x12P	27.94	32.86	2x27P	66.04	70.96		
2x13P	30.48	35.40	2x28P	68.58	73.50		
2x14P	33.02	37.94	2x29P	71.12	76.04		
2x15P	35.56	40.48	2x30P	73.66	78.58		
2x16P	38.10	43.02	2x31P	76.20	81.12		
			2x32P	78.74	83.66		

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05	绘图/DR	陈雄军	审核/CHK	陈雄军	日期/DATE	2019-06-03
修订版本		2015-11-04	陈雄军	ANGLE: ±1°	审核/CHK	陈雄军	批准/APPRO	胡进	日期/DATE	2019-06-03
变更图宽格式内容		2013-12-27	陈雄军		单位 Unit	MM	比例/Scale	1:1	页码/SHEET	1/1
新版本		2011-05-24	陈雄军		大小/Size	A4	版本/Rev	D	料号 (PART NO)	W2543V-2xNP
说明 DESCRIPTION			承认 APPRO.						状态码	C

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----