

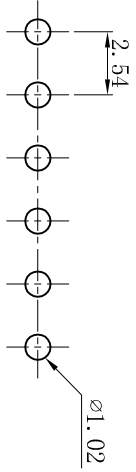
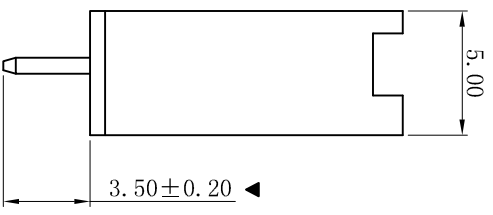
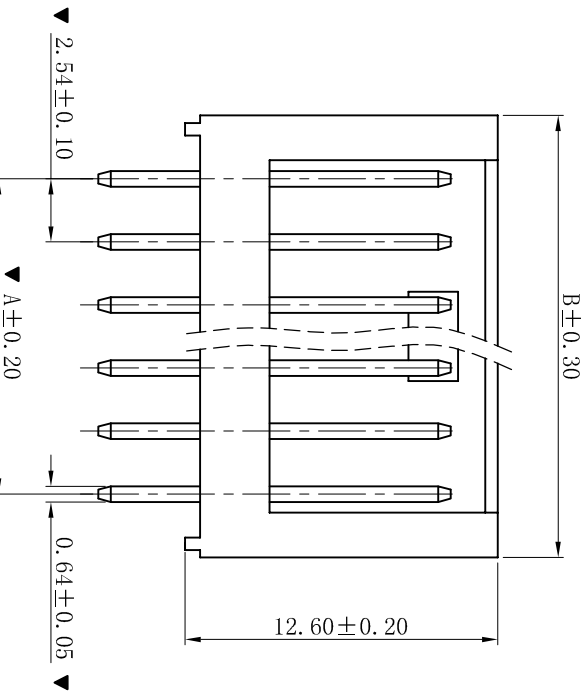


RoHS

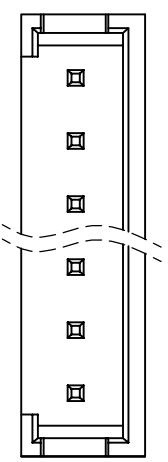

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2543V-NP
 - Poles : 02-22P
 - Housing Material: PA66 UL94V-2 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded



Poles	Dimensions (mm)	
	A	B
02	2.54	7.70
03	5.08	10.20
04	7.62	12.70
05	10.16	15.20
06	12.70	17.80
07	15.24	20.30
08	17.78	22.90
09	20.32	25.40
10	22.86	28.00
11	25.40	30.50
12	27.94	33.10
13	30.48	35.60
14	33.02	38.10
15	35.56	40.70
16	38.10	43.20
17	40.64	45.70
18	43.18	48.20
19	45.72	50.70
20	48.26	53.20
21	50.80	55.70
22	53.34	58.50

更新图面		2019-06-03		陈雄军		更新图面		2019-06-03		陈雄军	
修订版本		2015-11-04		陈雄军		修订版本		2015-11-04		陈雄军	
变更图宽格式内容		2013-12-27		陈雄军		变更图宽格式内容		2013-12-27		陈雄军	
新版本		2011-05-24		陈雄军		新版本		2011-05-24		陈雄军	
说明		日期		承认		说明		日期		承认	
DESCRPTION		DATE		APPRO.		DESCRPTION		DATE		APPRO.	

一般公差		0±0.30		投影法		第一角	
GENERAL TOLERANCE:		.00±0.25		Projection		First Angle	
		.000±0.20		单位		MM	
		ANGLE: ±1°		比例/Scale		1:1	
				大小/Size		A4	
				页码/Sheet		1/1	
				版本/Rev		D	

XYDZ® 东莞市祥运连接器有限公司		品名		AMP 2.54mm 180° Wafer	
Connectors		(PART NAME)		Connector Series	
Dongguan XiangYun Connectors CO., Ltd		料号		W2543V-NP	
		(PART NO)		状态码	
				C	