

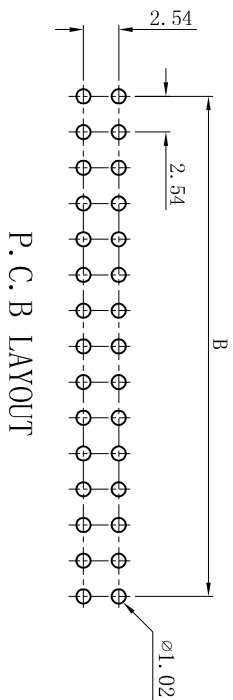


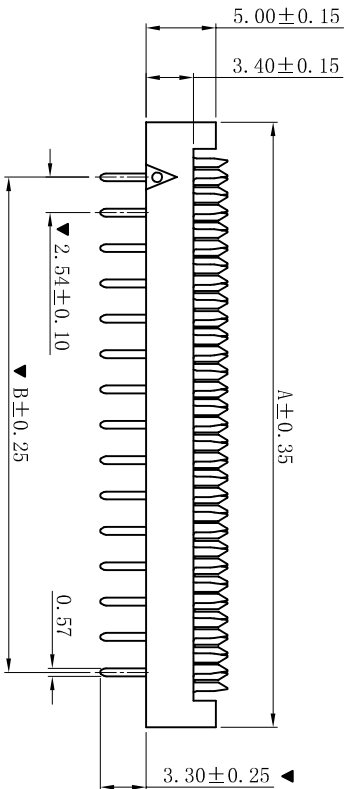



- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W2544IDC-2xNP-H7.3
 - Poles : 06-64P
 - Housing Material: PBT Glass Fiber (UL94V-0)
 - Pin Material: Brass
 - Contact Area Plating: Gold-plated Over Nickel
 - The Dimension Marked “▼” Must Be Recorded

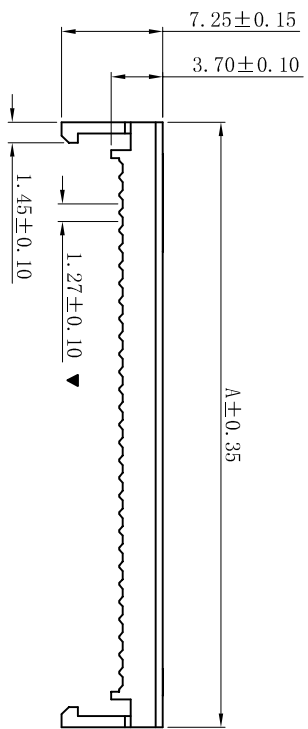

Poles	Dimension(mm)	
	A	B
6	12.98	5.08
8	15.52	7.62
10	18.06	10.16
12	20.60	12.70
14	23.14	15.24
16	25.68	17.78
18	28.22	20.32
20	30.76	22.86
22	33.30	25.40
24	35.84	27.94
26	38.38	30.48
30	43.46	35.56
34	48.54	40.64
40	56.16	48.26
44	61.24	53.34
50	68.86	60.96
60	81.56	73.66
64	86.64	78.74

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection		品名 (PART NAME)		IDC 2.54mm 180° 合高7.3mm Wafer	料号 (PART NO)	W2544IDC-2xNP-H7.3	状态码 C
修打版本		2015-11-04	陈雄军	ANGLE: ±1°	单位 Unit		(PART NAME)		Connector Series				
变更图宽格式内容		2013-12-27	陈雄军	绘图/DR		比例/Scale		料号 (PART NO)		W2544IDC-2xNP-H7.3	状态码 C		
新版本		2011-05-24	陈雄军	审核/CHECK		大小/Size		料号 (PART NO)		W2544IDC-2xNP-H7.3	状态码 C		
说明		2011-05-24	陈雄军	日期/DATE		页码/Sheet		料号 (PART NO)		W2544IDC-2xNP-H7.3	状态码 C		
DESCRPTION		2011-05-24	陈雄军	日期/DATE		页码/Sheet		料号 (PART NO)		W2544IDC-2xNP-H7.3	状态码 C		
版次 REV.		1	陈雄军	日期/DATE		页码/Sheet		料号 (PART NO)		W2544IDC-2xNP-H7.3	状态码 C		

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd