RoHS

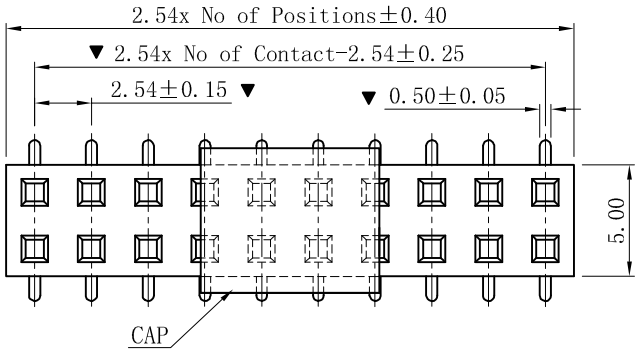

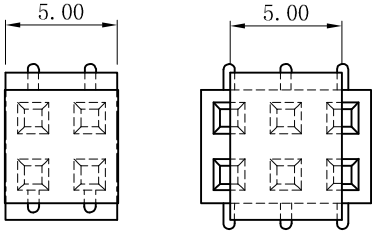

2x2~2x3P CAP帽长度5.0mm

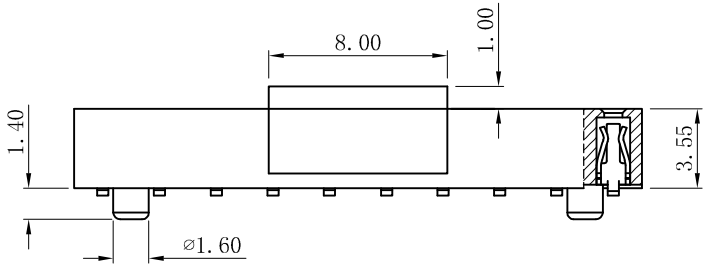

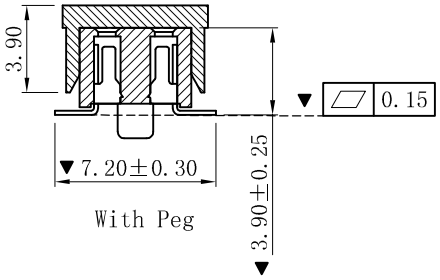

With Peg

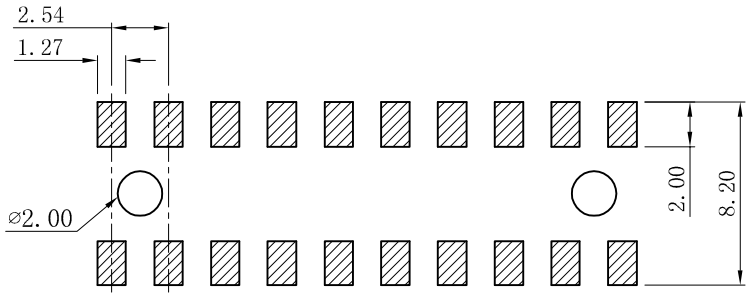

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2544MSV-2xNP-H3.55
- Poles : 04-80P
- Housing Material: PA6T/PA9T/LCP
- Pin Material: Brass
- Contact Area Plating: Gold-flash
- The Dimension Marked "▼" Must Be Recorded



Without Peg

REV.	DESCRIPTION	DATE.	APPRO.
B	新版本	2019-06-03	PH.Duan
A	新版本	2018-03-19	Jeff

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	杜邦 2.54mm 双排SMT排母 PH2.54 H3.55 U型 PW7.2 Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W2544MSV-2xNP-H3.55
页码/SHEET	1/1		状态码 C
版本/Rev	B		