
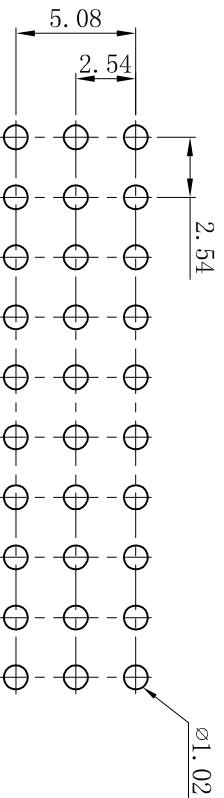
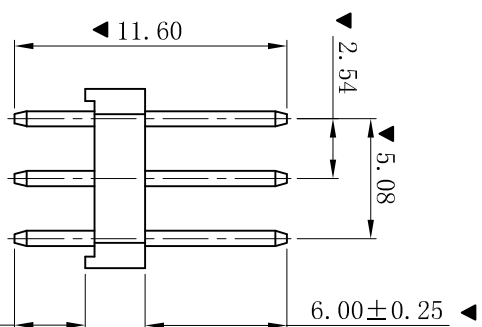
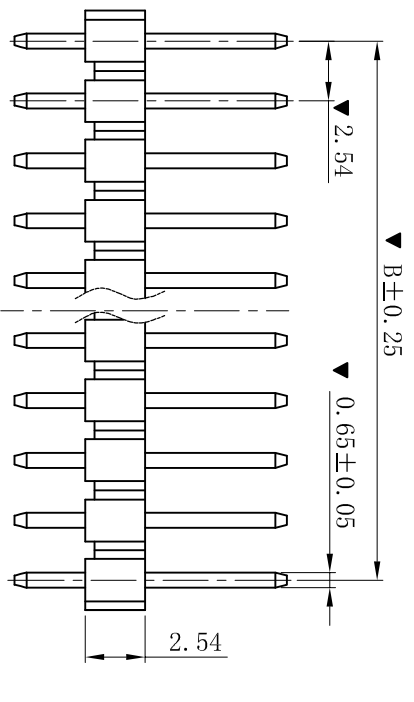


ROHS

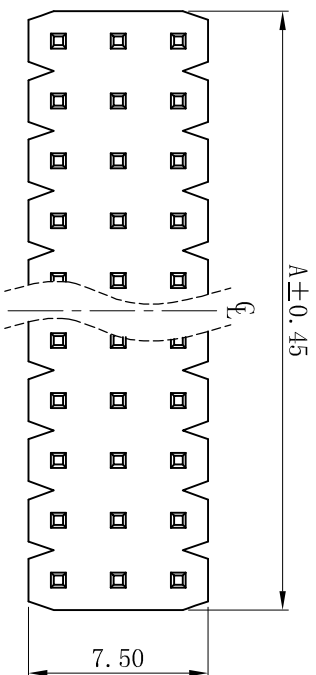

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2544V-3xNP
- Poles : 03-120P
- Housing Material: PBT UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

Dimensions List

PIN	DIP		DIP	
	A	B	A	B
3*01	2.54	0.00	3*21	53.34
3*02	5.08	2.54	3*22	55.88
3*03	7.62	5.08	3*23	58.42
3*04	10.16	7.62	3*24	60.96
3*05	12.70	10.16	3*25	63.50
3*06	15.24	12.70	3*26	66.04
3*07	17.78	15.24	3*27	68.58
3*08	20.32	17.78	3*28	71.12
3*09	22.86	20.32	3*29	73.66
3*10	25.40	22.86	3*30	76.20
3*11	27.94	25.40	3*31	78.74
3*12	30.48	27.94	3*32	81.28
3*13	33.02	30.48	3*33	83.82
3*14	35.56	33.02	3*34	86.36
3*15	38.10	35.56	3*35	88.90
3*16	40.64	38.10	3*36	91.44
3*17	43.18	40.64	3*37	93.98
3*18	45.72	43.18	3*38	96.52
3*19	48.26	45.72	3*39	99.06
3*20	50.80	48.26	3*40	101.6

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
绘图/DR	PPT/Draw
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/SHEET
1/1

版本/Rev
B

品名
(PART NAME)
2.54mm 180° 3xNP 排针
Connector Series

料号
(PART NO)
W2544V-3xNP

状态码
C

更新图面
新版本

2019-06-03

2017-09-11

说明
DESCRIPTION

日期
DATE

承认
APPRO.

Jeff

版次
REV.

1

2

3

4

5

6

7

8

9

10