
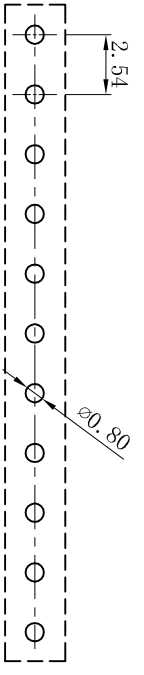

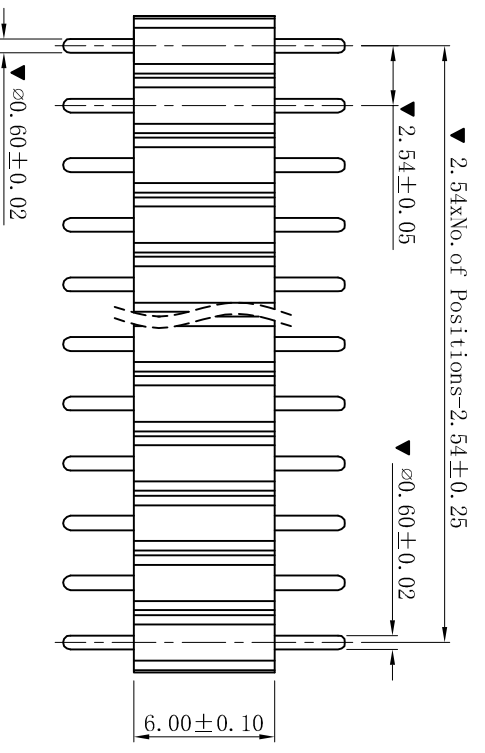


RoHS

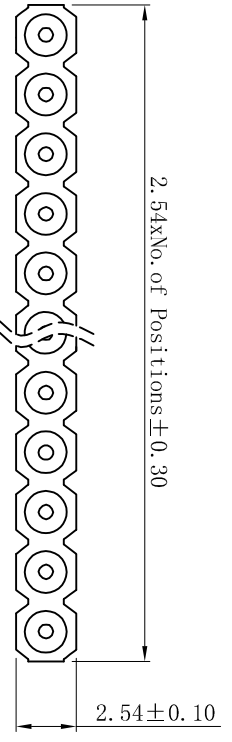

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 60V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2544VR-1xNP-H6. 0
- Poles : 1xNP
- Housing Material: PPS UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold Flash (0.5u" Min)
- The Dimension Marked "▼" Must Be Recorded

更新图面		2019-06-03		PPZ, Duwei		PPZ, Duwei		0±0.30 -0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd Connectors 投影法 Projection 单位 Unit MM 比例/Scale 1:1 大小/Size A4 页码/Sheet 1/1 版本/Rev B	
新版本		2019-04-20		PPZ, Duwei		胡进		品名 (PART NAME) 2.54mm 180° Wafer Connector Series		料号 (PART NO) W2544VR-1xNP-H6. 0	
说明		日期		承认		日期/DATE		状态码		C	
DESCRPTION		DATE		APPRO.		2019-06-03					