






ROHS




(高卡左扣)  
W2545R-02P-OEZK (左扣橙色)  
W2545R-02P-BKZK (左扣黑色)  
W2545R-02P-WEZK (左扣白色)  
W2545R-02P-YWZK (左扣黄色)


W2545R-02P-GNYK (右扣绿色)  
W2545R-02P-WEYK (右扣白色)  
W2545R-02P-BKYK (右扣黑色)

(高卡右扣)



- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W2545R-02P-XXXX-WL2.7
  - Housing Material: Nylon 66 15%GF UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Gold-Flash
  - The Dimension Marked "▼" Must Be Recorded

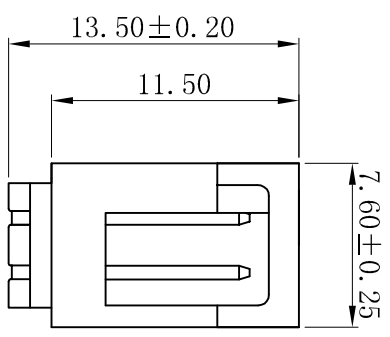

(左扣)



(右扣)

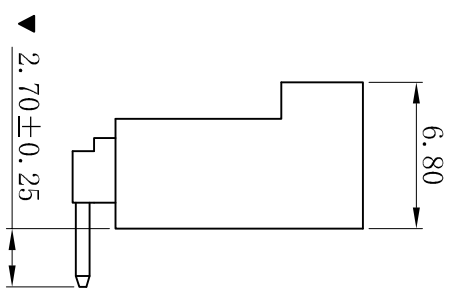

P. C. B LAYOUT

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	DESCRPTION	DATE	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.20
	.000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd

投影法  
 Projection  
单位 Unit: MM  
比例/Scale: 1:1  
大小/Size: A4  
页码/Sheet: 1/1  
版本/Rev: D

品名 (PART NAME): Molex 2.54mm 90° 2P 特殊 Wafer Connector Series  
料号 (PART NO): W2545R-02P-XXXX-WL2.7

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----