




RoHS



(高卡左扣)

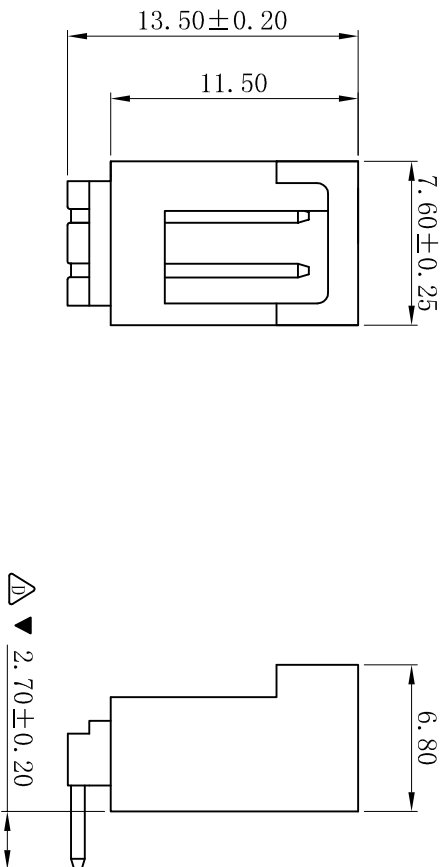

P. C. B LAYOUT



- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2545R-02P-YWGKZK-WL2.7
- Housing Material: PA66 15%GF UL94V-0, Yellow
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded
PIN L=0.64x15.00

更新图面		2019-06-03		2019-06-03		0±0.30		投影法		品名		MoIex 2.54mm 90° 2P 特殊	
变更外漏脚公差由: ±0.25 -> ±0.20		2018-12-06		2018-12-06		.00±0.25		第一角画法		(PART NAME)		Wafer Connector Series	
修訂版本		2015-11-04		2015-11-04		.000±0.05		比例/Scale		大小/Size		料号	
变更图宽格式内容		2013-12-27		2013-12-27		ANGLE: ±1°		审核/CHK		页码/Sheet		W2545R-02P-YWGKZK-WL2.7	
新版本		2011-05-24		2011-05-24				核准/APPRO		版本/Rev		状态码	
说明		日期		日期				日期/DATE		E		C	
DESCRIPTION		APPRO.		APPRO.									

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd