




ROHS

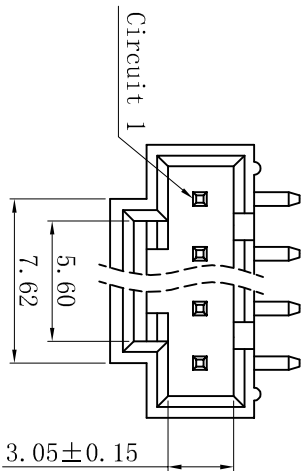

3 Poles






2 Poles

■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2545R-NP-WL1.8
- Poles : 02-20P
- Housing Material: PA66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded
- PIN L=0.64x15.50mm

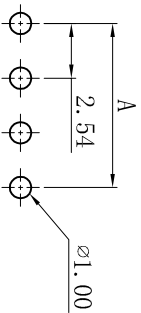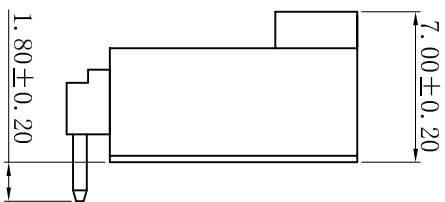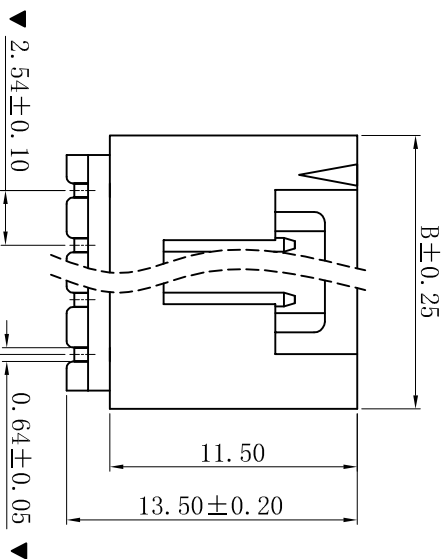

P.C.B LAYOUT



3D VIEW

Poles	Dimension (mm)	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection		品名 (PART NAME)		Molex 2.54mm 90° Wafer Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR		±1°	单位 Unit		料号 (PART NO)		W2545R-NP-WL1.8	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHKC			比例/Scale		状态码		C	
新版本		2011-05-24	陈雄军	批准/APPRO			大小/Size					
说明		日期	承认	日期/DATE			页码/Sheet					
版次				日期/DATE			版本/Rev					
REV.				日期/DATE			版本/Rev					

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd