




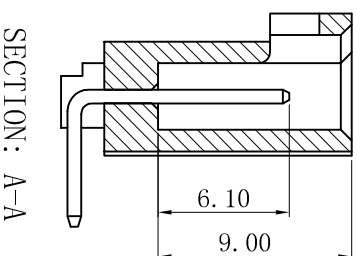
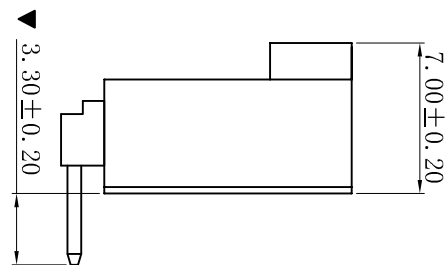
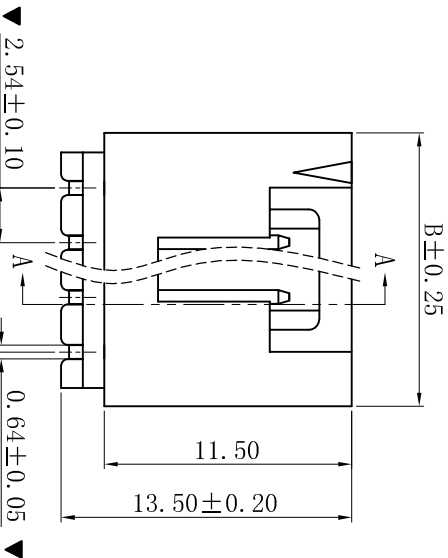



ROHS

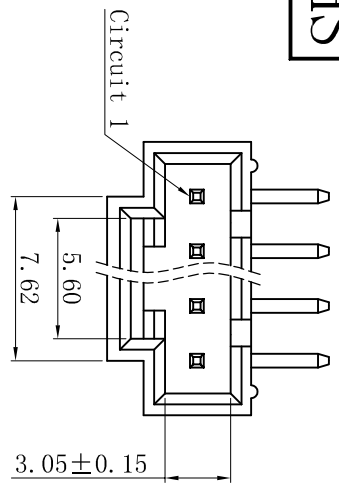

Poles	Dimension (mm)	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2545R-NP
- Poles : 02-20P
- Housing Material: PA66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

G

更新图面

2019-06-03

陈雄军

更新图面

2015-11-04

陈雄军

D

修订版本

2013-12-27

陈雄军

变更图宽格式内容

2011-05-24

陈雄军

C

新版本

说明

版次

REV.

1

1

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE: ±1°	

投影法	第一角
Projection	1st Angle
单位	MM
Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME)  
Molex 2.54mm 90° Wafer  
料号 (PART NO)  
Connector Series  
W2545R-NP  
状态码  
C

H

1

2

3

4

5

6

7

8

F

4 CIRCUIT

3 CIRCUIT

2 CIRCUIT

1

2

3

4

5

E

3.30±0.20

SECTION: A-A

6.10

9.00

7.00±0.20

7.62

5.60

3.05±0.15

D

13.50±0.20

11.50

B±0.25

2.54±0.10

A±0.20

A

2.54

Ø1.00

C

更新图面

2019-06-03

陈雄军

更新图面

2015-11-04

陈雄军

B

修订版本

2013-12-27

陈雄军

变更图宽格式内容

2011-05-24

陈雄军

A

新版本

说明

版次

REV.

1

1