

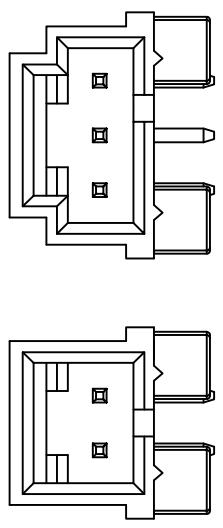
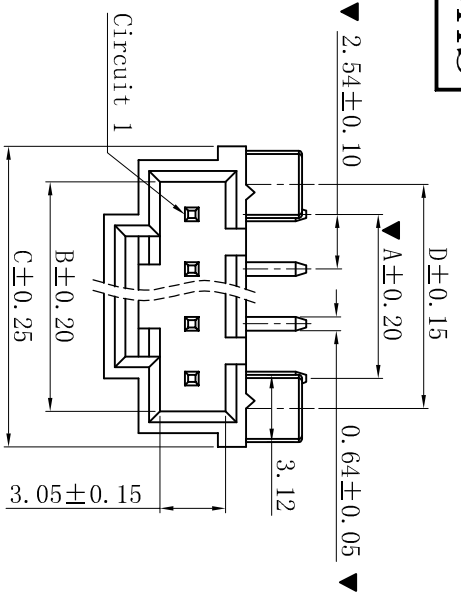



ROHS

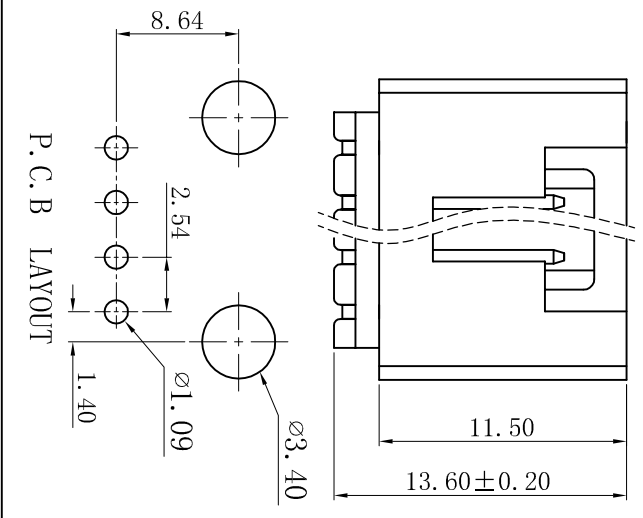

3 CIRCUIT
2 CIRCUIT

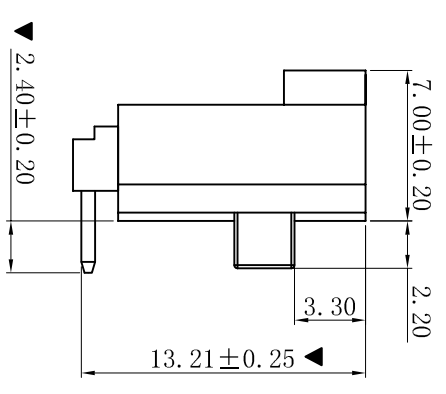

P.C.B LAYOUT



3D VIEW

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2545RD-NP-9TBK-WL2.4
 - Poles : 02-12P
 - Housing Material: PA9T UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Gold-Flash(0.5u" Min)
 - The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions (mm)			
	A	B	C	D
02	2.54	5.58	8.89	5.33
03	5.08	8.13	11.43	7.87
04	7.62	10.67	13.97	10.41
05	10.16	13.21	16.51	12.95
06	12.70	15.75	19.05	15.49
07	15.24	18.29	21.59	18.03
08	17.78	20.83	24.13	20.57
09	20.32	23.37	26.67	23.11
10	22.86	25.91	29.21	25.65
11	25.40	28.45	31.75	28.19
12	27.94	30.99	34.29	30.73

一般公差
GENERAL TOLERANCE:
0±0.30
.0±0.25
.00±0.20
.000±0.05
ANGLE: ±1°

投影法
Projection
单位 Unit
MM
比例/Scale
1:1
页码/SHEET
1/1
版本/Rev
D

品名 (PART NAME)
料号 (PART NO)
MoIex 2.54mm DIP 90°
Wafer Connector Series
W2545RD-NP-9TBK-WL2.4

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	新版本	2013-12-27	陈雄军	新版本
A	说明	2011-05-24	陈雄军	说明
版次 RRV.	DESCRIPTION	DATE	APPRO.	

审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----