
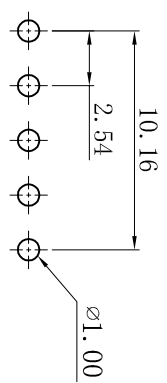
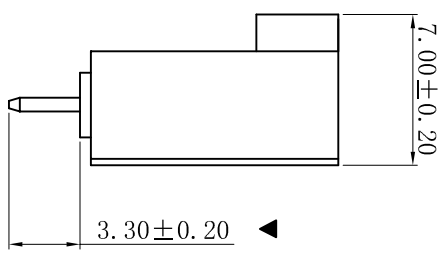
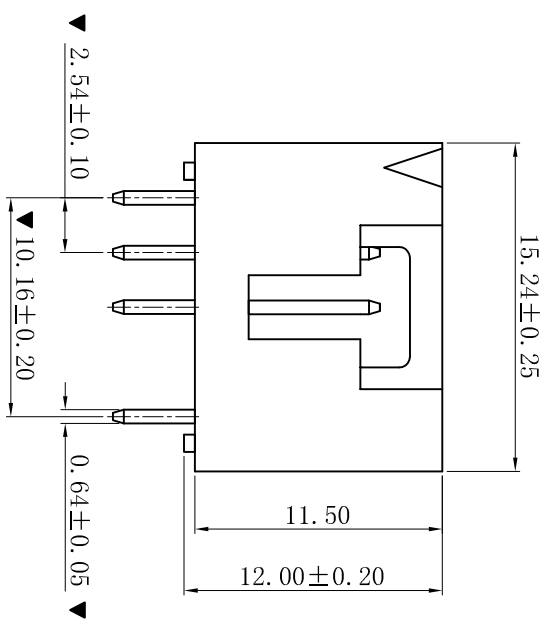


RoHS

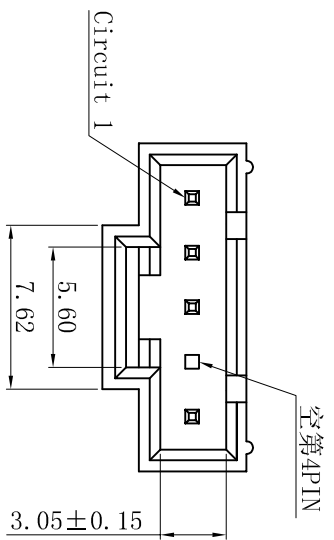

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M $\Omega$  min
- Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
- Contact resistance: 20m $\Omega$  max
- WAFER
- Part No. : W2545V-05P-K04
- Poles : 05P
- Housing Material : PA66 15%GF UL94V-0 Black
- Pin Material : Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05	绘图/DR	陈雄军	审核/CHKC	陈雄军	日期/DATE	2019-06-03	投影法 Projection	第一角法	品名 (PART NAME)	Molex 2.54mm 180 $^{\circ}$ Wafer Connector Series	
修订版本		2015-11-04	陈雄军	ANGLE: $\pm 1^{\circ}$	审核/CHKC	陈雄军	核准/APPRO	胡进	日期/DATE	2019-06-03	单位 Unit	MM	料号 (PART NO)	W2545V-05P-K04	
变更图宽格式内容		2013-12-27	陈雄军		日期/DATE	2019-06-03	页码/SHEET	1/1	版本/REV	D	大小/SIZE	A4	状态码	C	
新版本		2011-05-24	陈雄军		说明 DESCRIPTION										
版次 REV.		1													

**XYDZ<sup>®</sup> 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd