

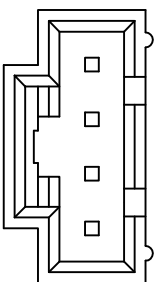



ROHS

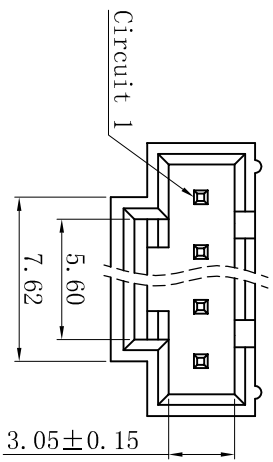





4 Poles



3 Poles




2 Poles

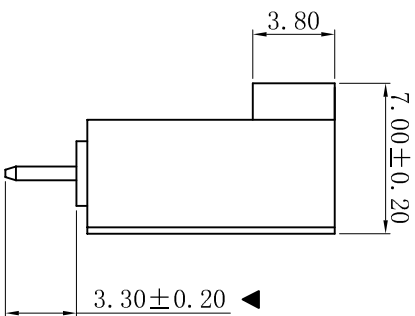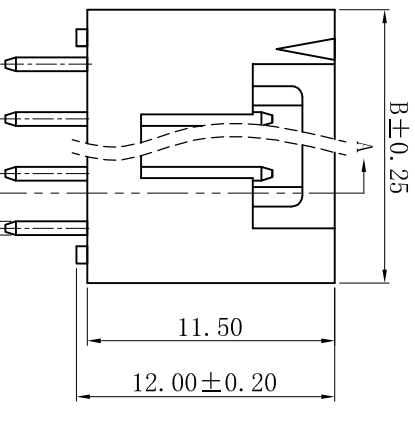

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2545V-NP
 - Poles : 02-20P
 - Housing Material: PA66 15%GF UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Gold-Flash
 - The Dimension Marked "▼" Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34



XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

一般公差
GENERAL TOLERANCE:
0±0.30
.0±0.25
.00±0.20
.000±0.05
ANGLE: ±1°

投影法
Projection



品名
(PART NAME)

Molex 2.54mm 180° Wafer
Connector Series

更新图面
修订版本
变更图宽格式内容
新版本

2019-06-03
2015-11-04
2013-12-27
2011-05-24

陈雄军
陈雄军
陈雄军
胡进

日期/DATE
2019-06-03

料号
(PART NO)

W2545V-NP

说明
DESCRIPTION

日期/DATE
2019-06-03

审核/CHECK
核准/APPRO
日期/DATE
2019-06-03

页码/SHEET
版本/Rev
D

状态码
C

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----