
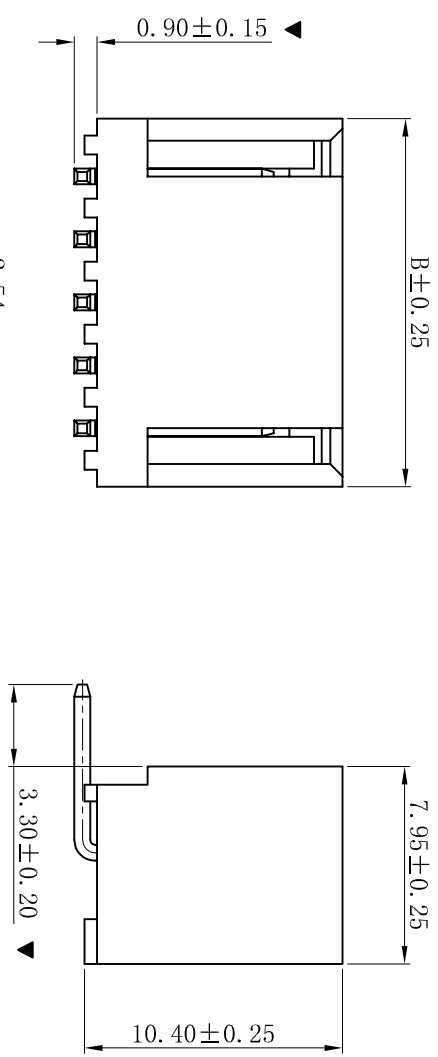
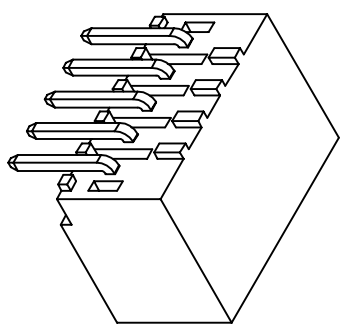


ROHS

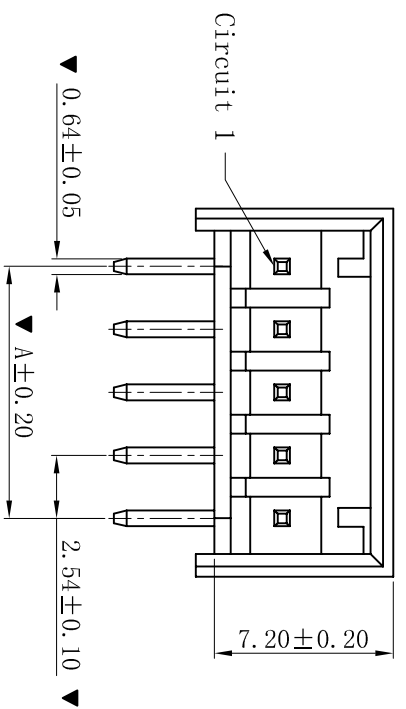

P. C. B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2548R-NP-B
- Poles : 02-16P
- Housing Material: PA66 UL94V-2 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.54	7.22
03	5.08	9.76
04	7.62	12.30
05	10.16	14.84
06	12.70	17.38
07	15.24	19.92
08	17.78	22.46
09	20.32	25.00
10	22.86	27.54
11	25.40	30.08
12	27.94	32.62
13	30.48	35.16
14	33.02	37.70
15	35.56	40.24
16	38.10	42.78

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

品名 (PART NAME)	2.54mm 90° Wafer Connector Series
料号 (PART NO)	W2548R-NP-B
状态码	C

D	更新图面	2019-06-03	陈雄军	承认	日期	2019-06-03
C	修打版本	2015-11-04	陈雄军	承认	日期	2015-11-04
B	变更图宽格式内容	2013-12-27	陈雄军	承认	日期	2013-12-27
A	新版本	2011-05-24	陈雄军	承认	日期	2011-05-24

1	版次 REV.	说明 DESCRIPTION
---	------------	-------------------