

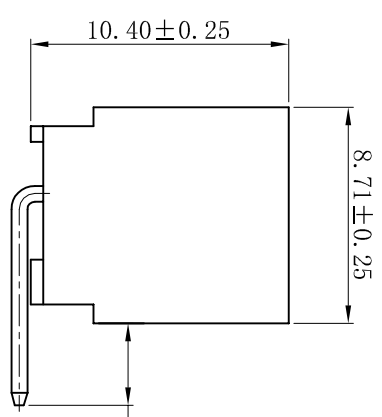
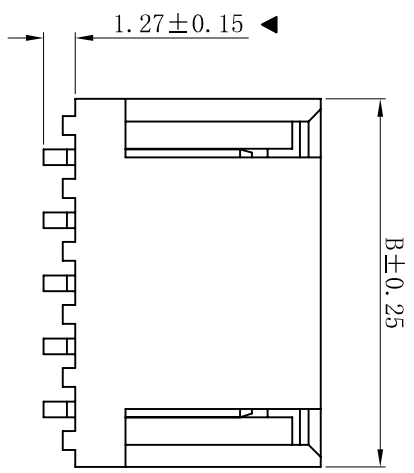
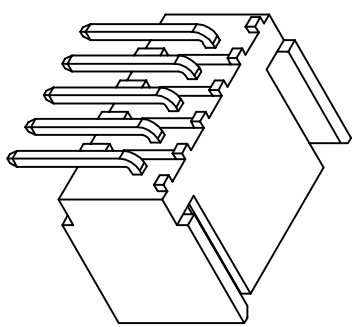


ROHS

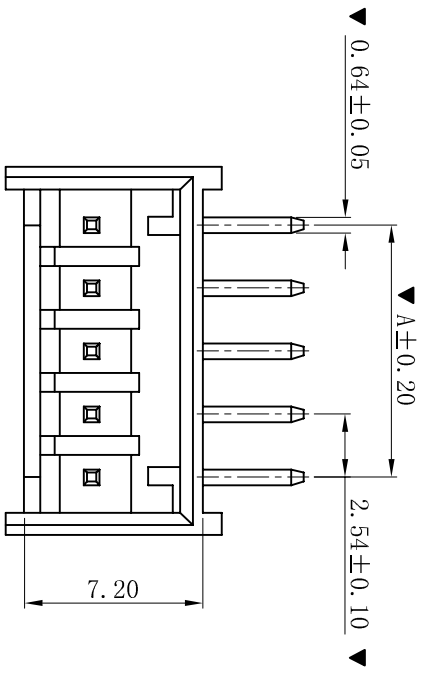

P.C.B LAYOUT

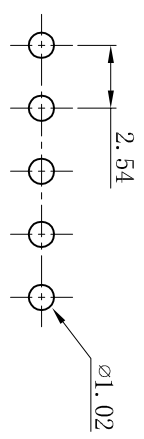

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W2548R-NP
 - Poles : 02-16P
 - Housing Material: PA66 UL94V-2 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.54	7.22
03	5.08	9.76
04	7.62	12.30
05	10.16	14.84
06	12.70	17.38
07	15.24	19.92
08	17.78	22.46
09	20.32	25.00
10	22.86	27.54
11	25.40	30.08
12	27.94	32.62
13	30.48	35.16
14	33.02	37.70
15	35.56	40.24
16	38.10	42.78

D		图面更新		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) 2.54mm 90° Wafer Connector Series		料号 (PART NO) W2548R-NP		状态码 C	
C		修打版本		2015-11-04	陈雄军	绘图/DR 陈雄军		审核/CHECK 陈雄军		大小/SIZE A4					
B		变更图宽格式内容		2013-12-27	陈雄军	核准/APPRO 胡进		日期/DATE 2019-06-03		页码/SHEET 1/1		版本/Rev D			
A		新版本		2011-05-24	陈雄军	日期/DATE 2019-06-03		承认 APPRO.		说明 DESCRIPTION					
H		版次 REV.		1											

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd