
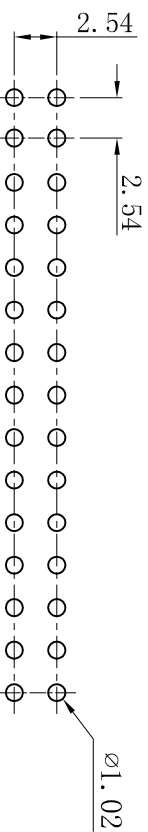
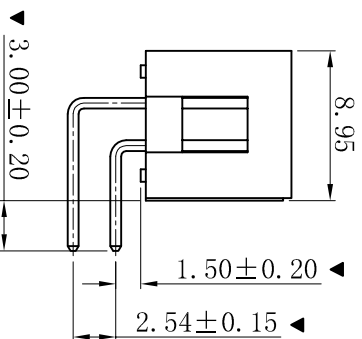
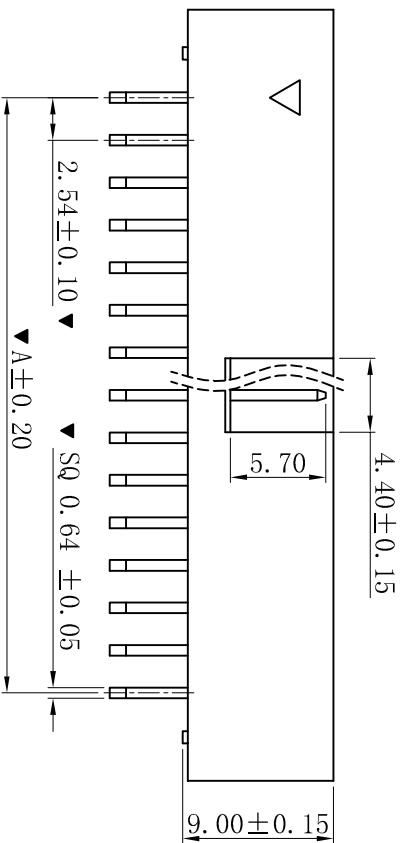



RoHS

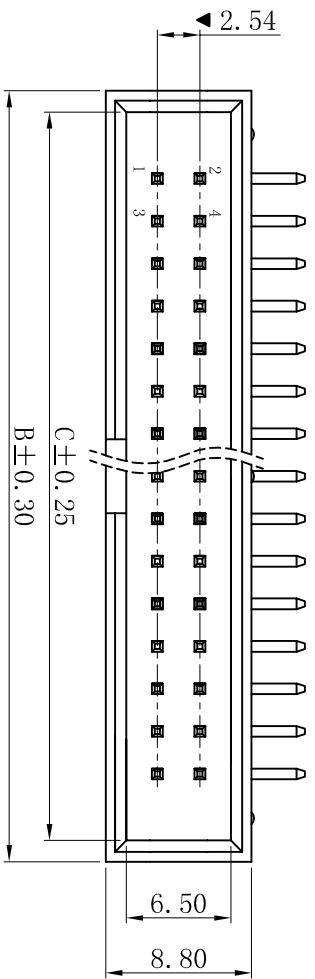

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C⁺+105° C
- Contact resistance: 20mΩ max
- WAFER
 - Part No.: WJL2544R-2xNP
 - Poles : 06-64P
 - Housing Material: PBT+30%G.F UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Gold-Flash
 - The Dimension Marked “▼” Must Be Recorded

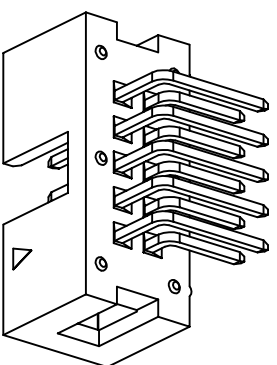

Poles	Dimension (mm)		
	A	B	C
2x03	5.08	15.24	12.94
2x04	7.62	17.78	15.48
2x05	10.16	20.32	18.02
2x06	12.70	22.86	20.56
2x07	15.24	25.40	23.10
2x08	17.78	27.94	25.64
2x09	20.32	30.48	28.18
2x10	22.86	33.02	30.72
2x11	25.40	35.56	33.26
2x12	27.94	38.10	35.80
2x13	30.48	40.64	38.34
2x15	35.56	45.72	43.42
2x16	38.10	48.26	45.96
2x17	40.64	50.80	48.50
2x20	48.26	58.42	56.12
2x22	53.34	63.50	61.20
2x25	60.96	71.12	68.82
2x30	73.66	83.82	81.52
2x32	78.74	88.90	86.60

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差
GENERAL TOLERANCE:
ANGLE: ±1°

0±0.30
.0±0.25
.000±0.05

绘图/DR
审核/CHECK
日期/DATE

投影法
单位 Unit
比例/Scale
大小/Size
页码/SHEET
版本/Rev

品名 (PART NAME)
料号 (PART NO)
WJL2544R-2xNP

2.54mm Box Header DIP 90°
Connector Series

状态码 C

版本号 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
A	新版本	2019-04-16	PZY Chen

陈雄军
胡进

MM
1:1
A4
1/1
A

东莞市祥运连接器有限公司

