

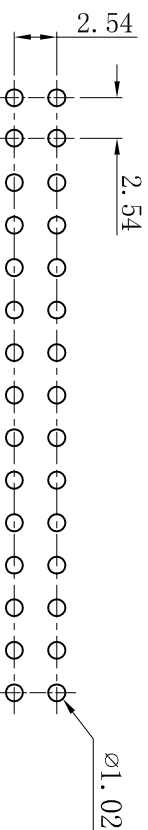
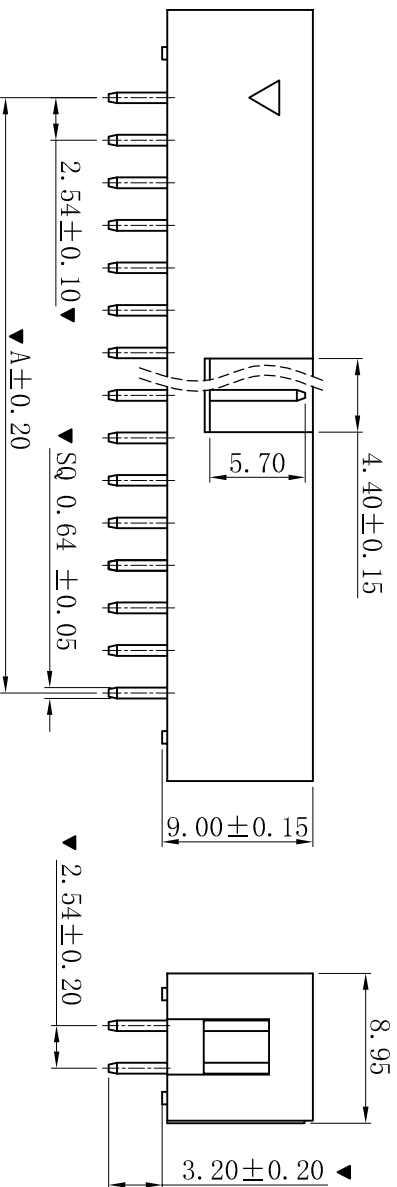


RoHS

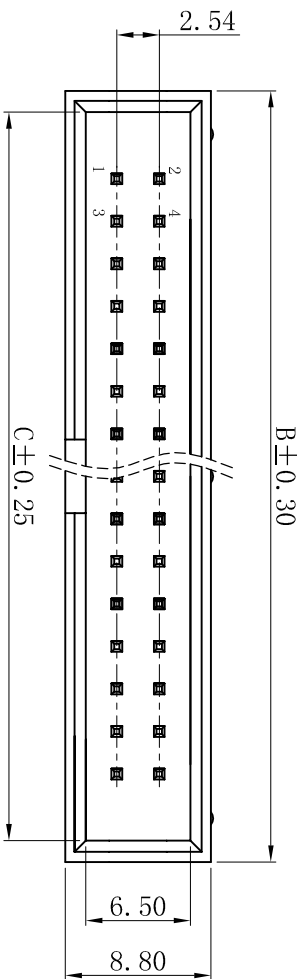

P.C.B LAYOUT

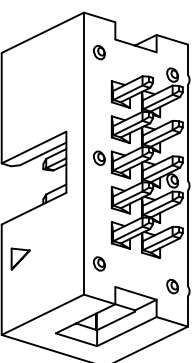

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C⁺+105° C
- Contact resistance: 20mΩ max
- WAFER
- Part No.: WJL2544V-2xNP
- Poles : 06-64P
- Housing Material: PBT+30%G.F UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		
	A	B	C
2x03	5.08	15.24	12.94
2x04	7.62	17.78	15.48
2x05	10.16	20.32	18.02
2x06	12.70	22.86	20.56
2x07	15.24	25.40	23.10
2x08	17.78	27.94	25.64
2x09	20.32	30.48	28.18
2x10	22.86	33.02	30.72
2x11	25.40	35.56	33.26
2x12	27.94	38.10	35.80
2x13	30.48	40.64	38.34
2x14	33.02	43.18	40.88
2x15	35.56	45.72	43.42
2x16	38.10	48.26	45.96
2x17	40.64	50.80	48.50
2x20	48.26	58.42	56.12
2x22	53.34	63.50	61.20
2x25	60.96	71.12	68.82
2x30	73.66	83.82	81.52
2x32	78.74	88.90	86.60

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
绘图/DR	P.P. Davis
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-04-16

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	A

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME) 2.54mm Box Header DIP 180°
料号 (PART NO) WJL2544V-2xNP

版本号 REV.	1	2	3	4	5	6	7	8	9	10
说明 DESCRIPTION			新版本							
日期 DATE			2019-04-16							
承认 APPRO.			P.P. Davis							

