

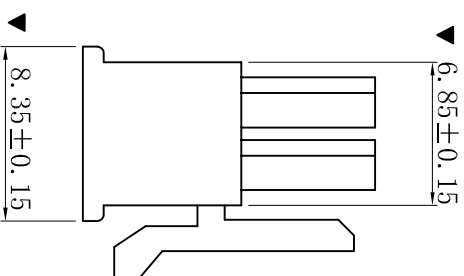
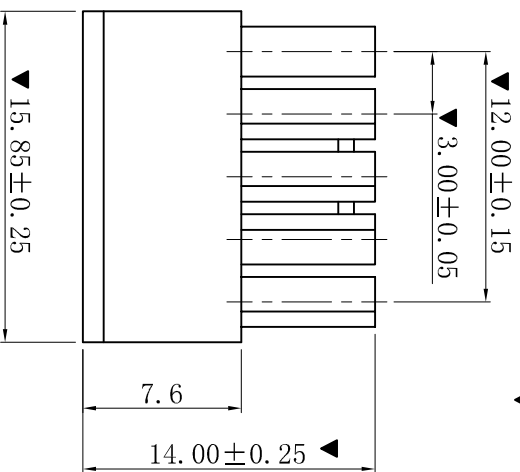


RoHS

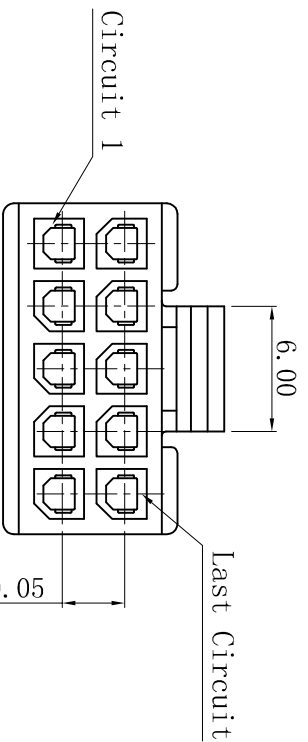

3D VIEW

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H3025-2x05P-STD
- Poles : 02-05P
- Housing Material : PA66 UL94V-2 Black
- The Dimension Marked “▼” Must Be Recorded

注明:

1. 产品不可有, 缺胶, 脏污, 缩水, 堵孔, 等不良.

		一般公差 GENERAL TOLERANCE:		0±0.20 .0±0.15 .00±0.10 .000±0.03	
		绘图/DR		2019-06-03	
		审核/CHECK		陈雄军	
		批准/APPRO		胡进	
		日期/DATE		2019-06-03	
		更新图面		2019-06-03	
		新版本		2018-07-21	
		说明		段平会	
		DESCRIPTION		承认	
		REV.		APPRO.	
1		2		3	
4		5		6	
7		8		9	
10					

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan Xiangyun Connector s CO., Ltd</p>		<p>投影法 Projection</p>		<p>品名 (PART NAME)</p>	
<p>单位 Unit</p>		<p>MM</p>		<p>Molex 3.00mm Male Housing Connector Series</p>	
<p>比例/Scale</p>		<p>1:1</p>		<p>料号 (PART NO)</p>	
<p>大小/SIZE</p>		<p>A4</p>		<p>H3025-2x05P-STD</p>	
<p>页码/SHEET</p>		<p>1/1</p>		<p>状态码</p>	
<p>版本/Rev</p>		<p>B</p>		<p>C</p>	