

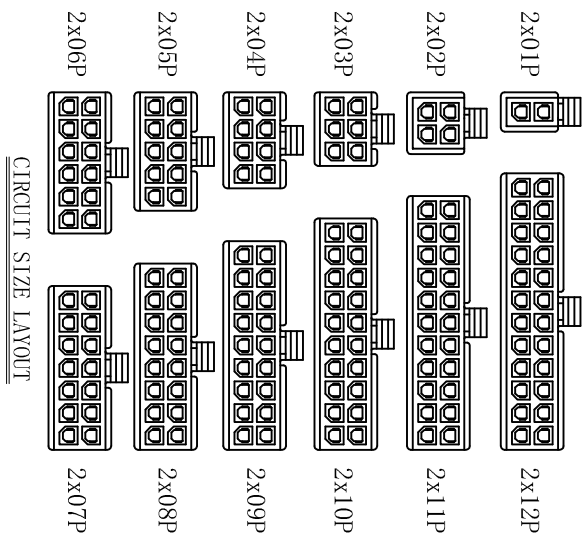
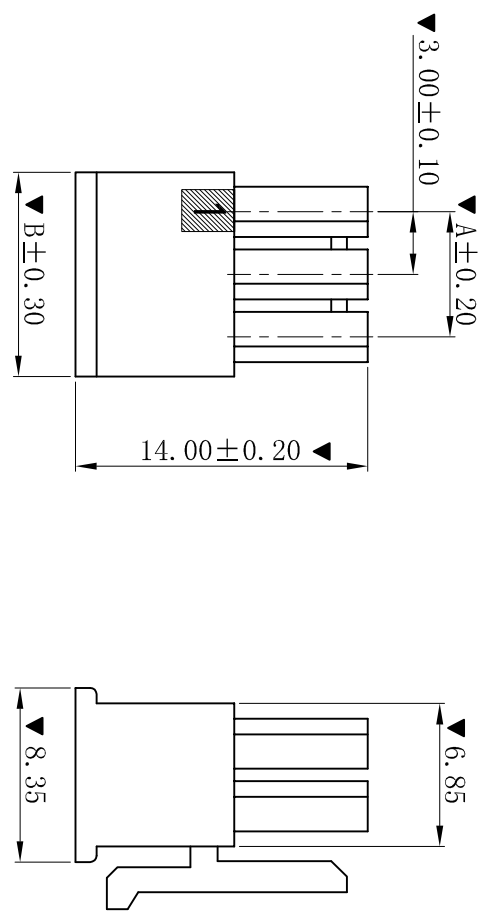


ROHS

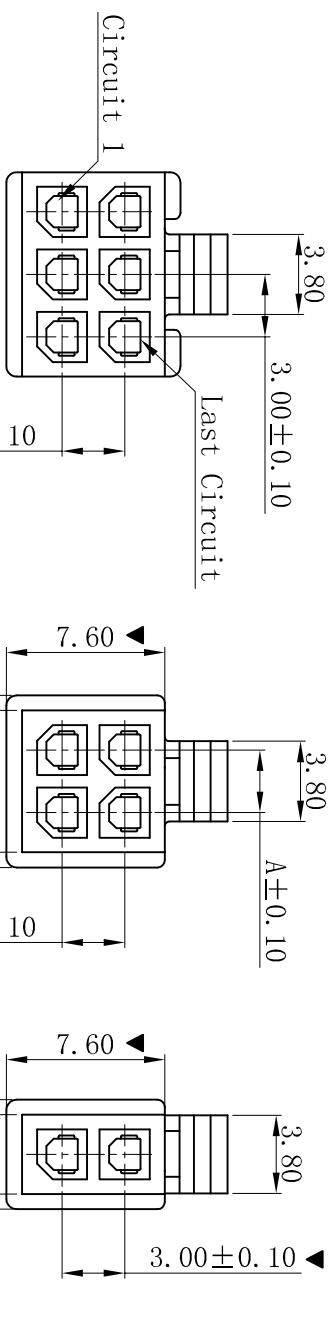

Poles	Dimensions (mm)	
	A	B
02	---	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H3025-2xNP
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 Black
 - The Dimension Marked "▼" Must Be Recorded



XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors Co., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 -0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

更新图面	2019-06-03	陈雄军
修打版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRPTION	DATE:	APPRO.

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----

投影法 Projection	第一角	品名 (PART NAME)	Molex 3.00mm Male Housing	料号 (PART NO)	H3025-2xNP	状态码	C
单位 Unit	MM	比例/Scale	1:1	页码/SHEET	1/1		
审核/CHECK	陈雄军	日期/DATE	2019-06-03				
批准/APPRO	胡进						