
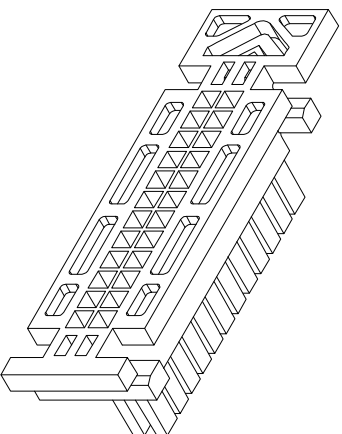
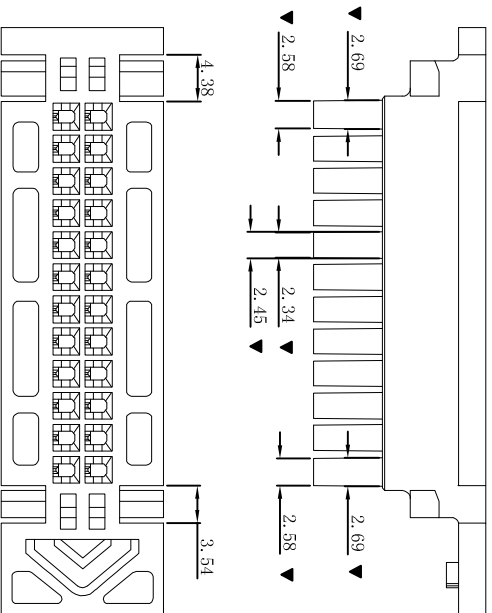

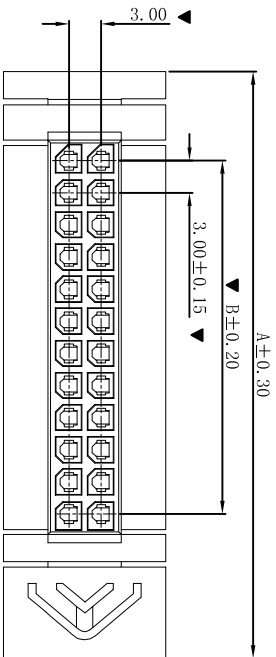


RoHS

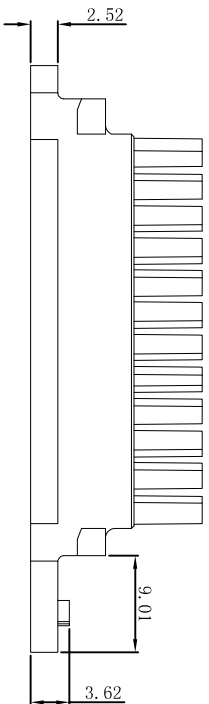

Poles	Dimensions (mm)	
	A	B
2x02	20.3	3.00
2x03	23.3	6.00
2x04	26.3	9.00
2x05	29.3	12.00
2x06	32.3	15.00
2x07	35.3	18.00
2x08	38.3	21.00
2x09	41.3	24.00
2x10	44.3	27.00
2x11	47.3	30.00
2x12	50.3	33.00

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING

- Part No. : H3033-2xNP-SL
- Poles : 04-24P
- Housing Material: PA66 UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-27

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/SHEET
1/2

版本/Rev
A

品名
(PART NAME)
Molex 3.00mm Male 喇叭口
Housing Connector Series

料号
(PART NO)
H3033-2xNP-SL

状态码
C

日期/DATE	2019-06-27	承认 APPRO.	陈雄军
说明 DESCRIPTION	新版本		
版次 REV.	1		

日期/DATE	2019-06-27	承认 APPRO.	陈雄军
说明 DESCRIPTION	新版本		
版次 REV.	1		