
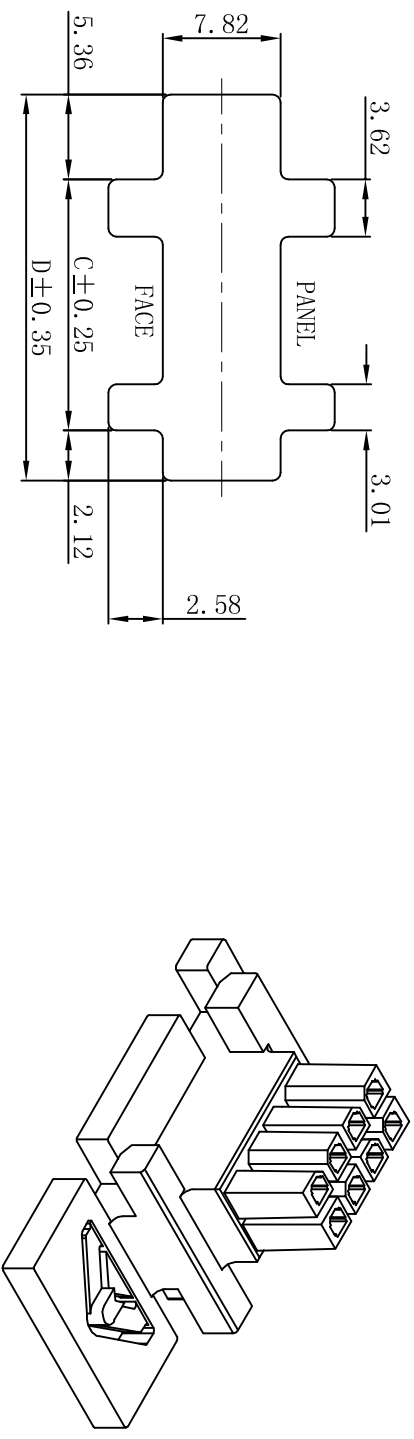
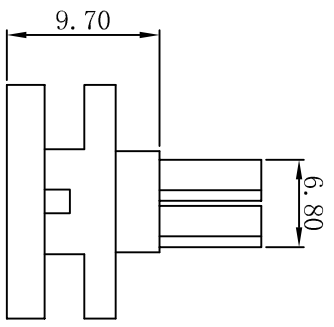
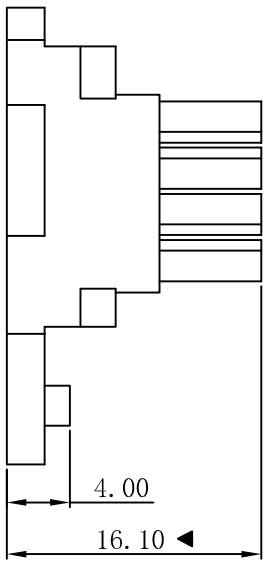


ROHS

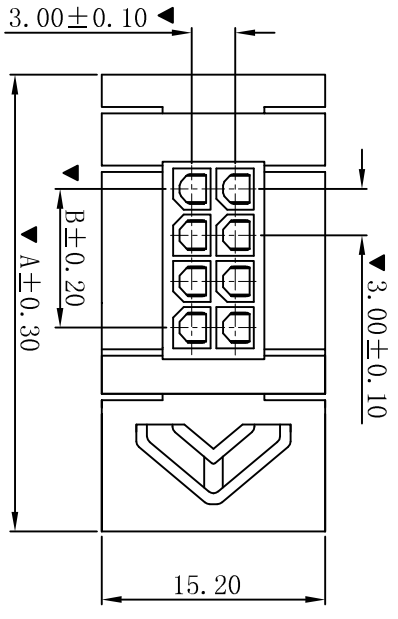

- SPECIFICATIONS
  - Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25°C~+85°C
- HOUSING
  - Part No.: H3033-2xNP
  - Poles : 02-24P
  - Housing Material: PA66 UL94V-2 Black
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)			
	A	B	C	D
2x02	24.60	3.00	13.46	22.10
2x03	27.70	6.00	16.46	25.10
2x04	30.70	9.00	19.46	28.10
2x05	33.80	12.00	22.46	31.10
2x06	36.80	15.00	25.46	34.10
2x07	39.90	18.00	28.46	37.10
2x08	42.90	21.00	31.46	40.10
2x09	46.00	24.00	34.46	43.10
2x10	49.00	27.00	37.46	46.10
2x11	51.80	30.00	40.46	49.10
2x12	54.90	33.00	43.46	52.10

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	版次 REV.	1	说明 DESCRIPTION	日期 DATE

XYDZ® 东莞市祥运连接器有限公司  
Dongguan Xiangyun Connectors CO., Ltd

投影法 Projection	第一角	单位 Unit	MM	比例/Scale	1:1	大小/Size	A4	页码/Sheet	1/1	版本/Rev	D
品名 (PART NAME)	Molex 3.00mm Male 喇叭口 Housing Connector Series				料号 (PART NO)	H3033-2xNP					
状态码	C										