

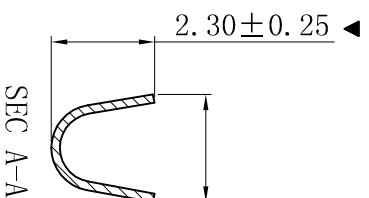
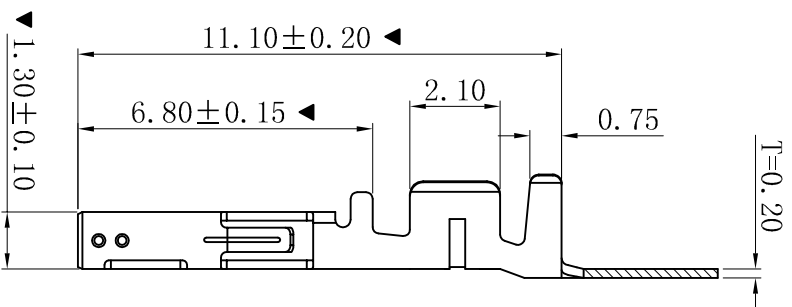


ROHS

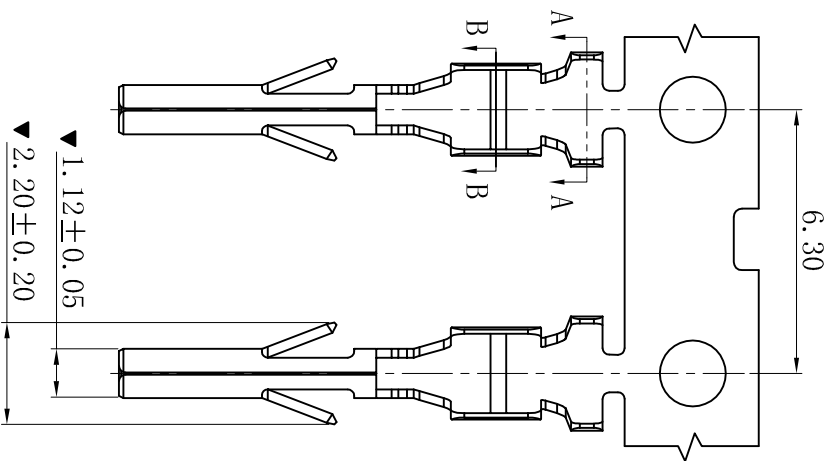

SEC A-A

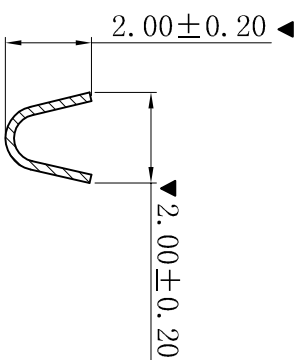

SEC B-B

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL

- Part No.: T3030PT
- Applicable wire: AWG#22-#24
- Material: Phosphor Bronze
- Finish: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
 DongGuan Xi anGyun Connectors CO., Ltd

| | |
|-------------------------------|--------------------------------|
| 一般公差 GENERAL TOLERANCE: | 0±0.30 .0±0.25 .000±0.05 |
| ANGLE: ±1° | |

| | |
|----------|----------|
| 绘图/DR | 陈雄军 |
| 审核/CHECK | 胡进 |
| 批准/APPRO | MR. feng |

| | |
|-------------------|-----|
| 投影法 Projection | |
| 单位 Unit | MM |
| 比例/Scale | 1:1 |
| 大小/SIZE | A4 |
| 页码/SHEET | 1/1 |
| 版本/Rev | D |

| | |
|-------------------|------------------------------|
| 品名 (PART NAME) | Molex 3.00mm Female Terminal |
| 料号 (PART NO) | T3030PT |

状态码
C

| | | | | |
|---|----------|------------|-----|----|
| D | 更新图面 | 2019-06-03 | 陈雄军 | 承认 |
| C | 修订版本 | 2015-11-04 | 陈雄军 | |
| B | 变更图宽格式内容 | 2013-12-27 | 陈雄军 | |
| A | 新版本 | 2011-05-24 | 陈雄军 | |

| | | | |
|------------|-------------------|------------|--------------|
| 版次 REV. | 说明 DESCRIPTION | 日期 DATE | 承认 APPRO. |
| 1 | | | |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|---|---|---|---|---|---|---|---|---|----|