


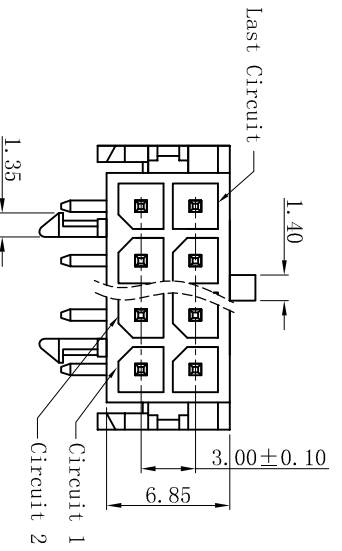
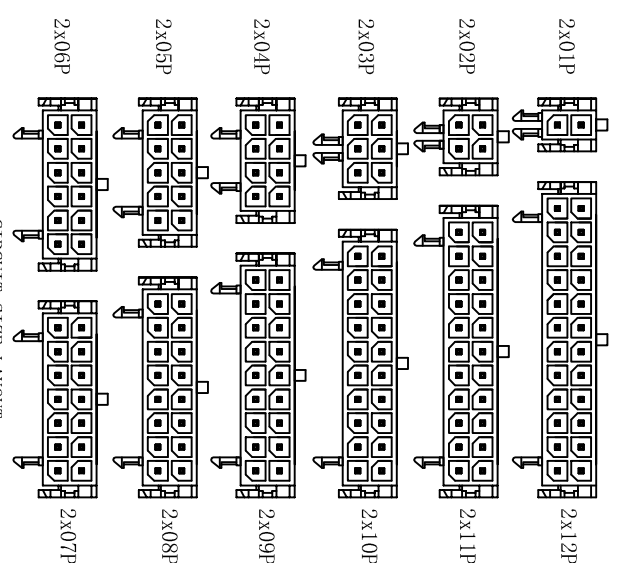


ROHS

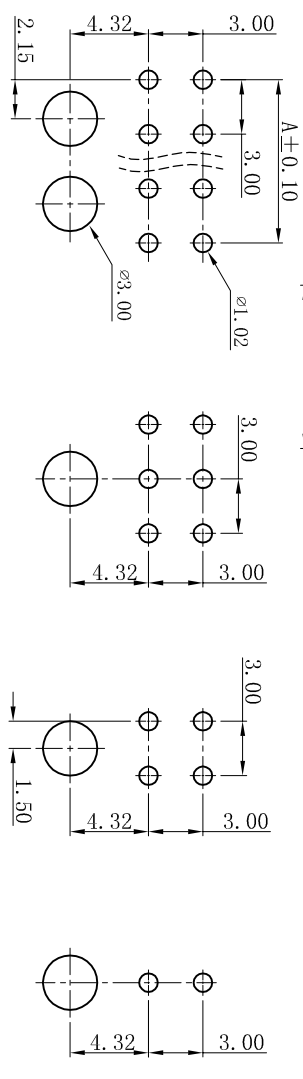

- ### ■ SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25 °C +85 °C
 - Contact resistance: 20mΩ max
- ### ■ WAFER
- Part No.: W3045R-2xNP-WL2.0
 - Poles : 02-24P
 - Housing Material: PA66 15%GF UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▲" Must Be Recorded

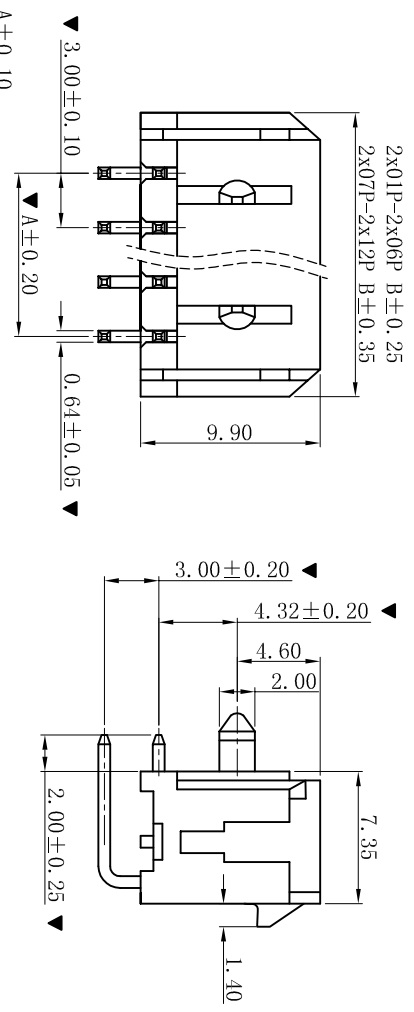

Poles	Dimensions (mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

更新图画		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05 ANGLE: ±1°	投影法 Projection	品名 (PART NAME)	Molex 3.0mm 90° Wafer Connector Series	版本号 REV.	1
修打版本		2015-11-04	陈雄军		单位 Unit			说明 DESCRIPTION	2
变更图规格式内容		2013-12-27	陈雄军		比例/Scale	1:1		日期 DATE	3
新版本		2011-05-24	陈雄军		大小/Size	A4		日期 DATE	4
新版			陈雄军		页码/SHEET	1/1		日期 DATE	5
说明			承认		版本/Rev	D		日期 DATE	6
描述								日期 DATE	7
								日期 DATE	8
								日期 DATE	9
								日期 DATE	10

料号 W3045R-2xNP-WL2.0 状态码 C