


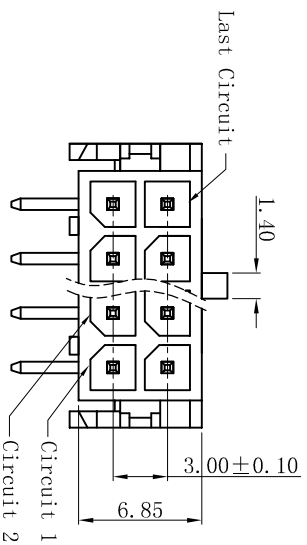
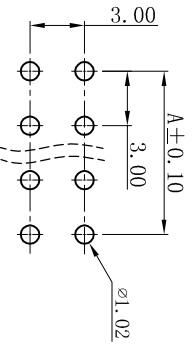


ROHS

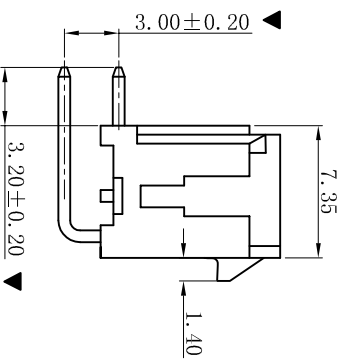

3D VIEW

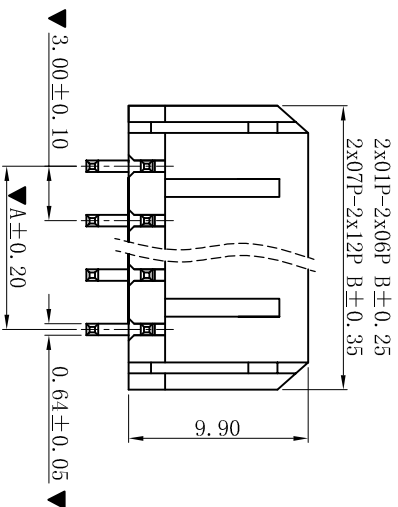


P.C.B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3045RND-2xNP
- Poles : 02-24P
- Housing Material: PA66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

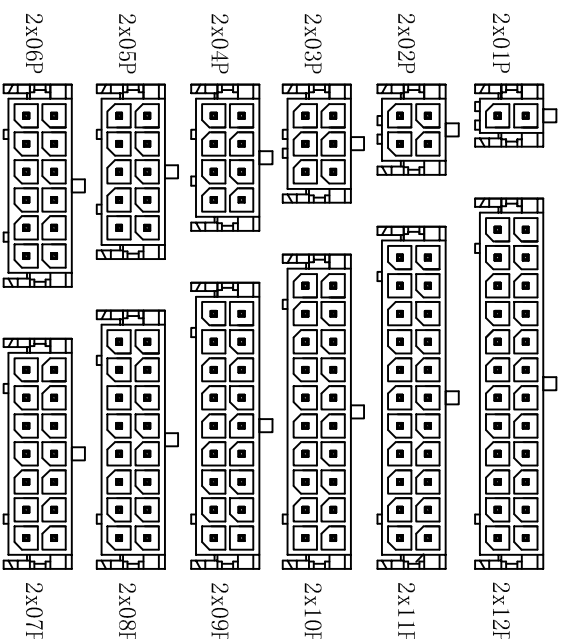

CIRCUIT SIZE LAYOUT

Poles	Dimensions (mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE:	±1°

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

投影法 Projection	第一角	品名 (PART NAME)	Molex 3.0mm 90° 无柱 Wafer
单位 Unit	MM	料号 (PART NO)	W3045RND-2xNP
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		

D	更新图画	2019-06-03	陈雄军	承认	2019-06-03
C	修订版本	2015-11-04	陈雄军		
B	变更图宽格式内容	2013-12-27	陈雄军		
A	新版本	2011-05-24	陈雄军		
H	说明	日期	承认		
1	版次	DESCRIPTION			
2					
3					
4					
5					
6					
7					
8					
9					
10					