

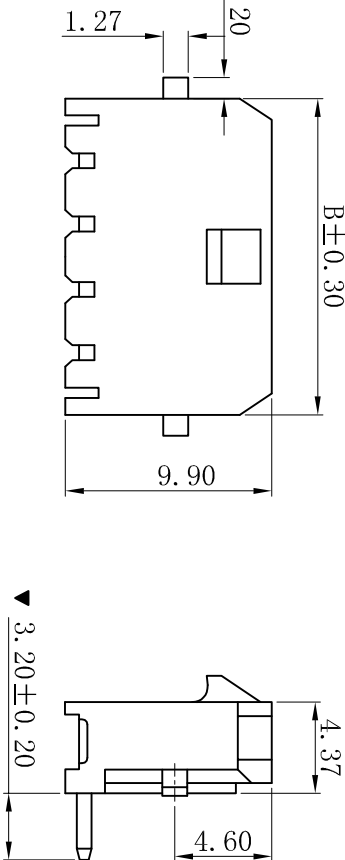



RoHS

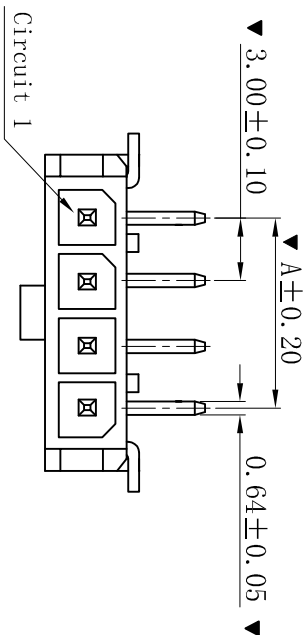

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W3045RS-NP
 - Poles : 02-12P
 - Housing Material: PA66 15%GF UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

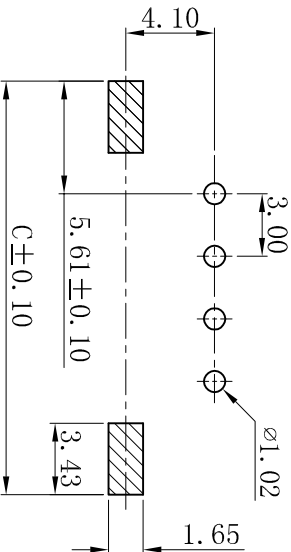

P.C.B. LAYOUT
TOLERANCE: ±0.05mm

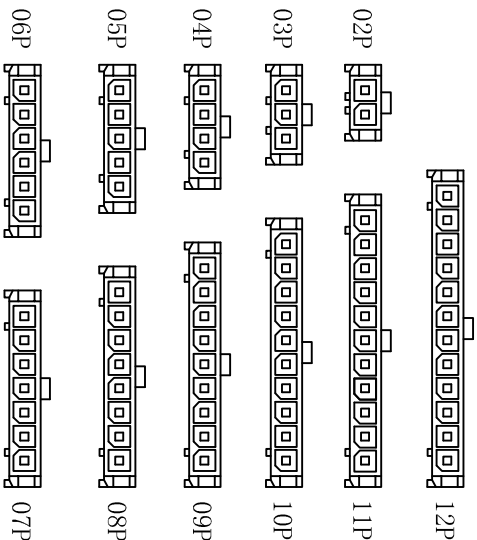

Poles	Dimensions (mm)		
	A	B	C
02	3.00	9.65	14.20
03	6.00	12.65	17.20
04	9.00	15.65	20.20
05	12.00	18.65	23.20
06	15.00	21.65	26.20
07	18.00	24.65	29.20
08	21.00	27.65	32.20
09	24.00	30.65	35.20
10	27.00	33.65	38.20
11	30.00	36.65	41.20
12	33.00	39.65	44.20

						一般公差 GENERAL TOLERANCE:		0±0.30 -0±0.25 .00±0.20 .000±0.05	投影法 Projection  MM	品 名 (PART NAME) Molex 3.0mm DIP 90° 焊片式 Wafer Connector Series	料 号 (PART NO) W3045RS-NP	状态码 C
						ANGLE: ±1°						
D	更新图面	2019-06-03	P.C. Draw			绘图/DR	陈雄军	审核/CHECK	胡 进	核准/APPRO	日期/DATE	2019-06-03
C	修订版本	2015-11-04	陈雄军									
B	变更图宽格式内容	2013-12-27	陈雄军									
A	新版本	2011-05-24	陈雄军									
版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.									