RoHS

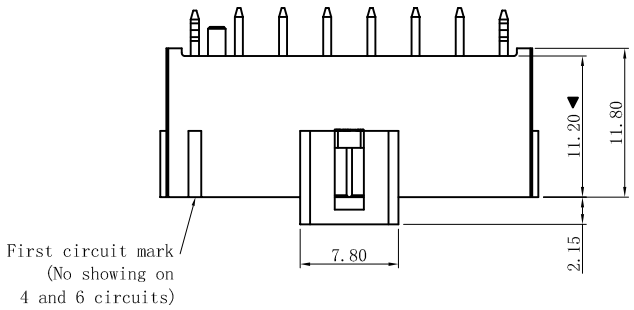

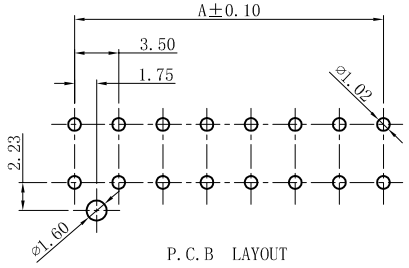

P.C.B LAYOUT
TOLERANCE: ±0.05mm

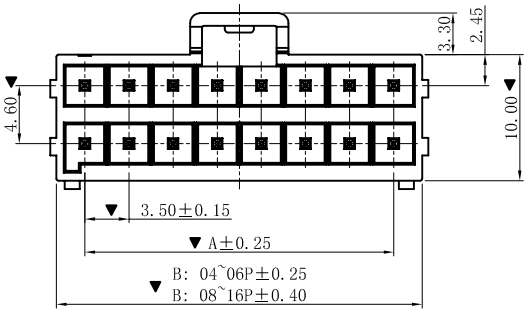



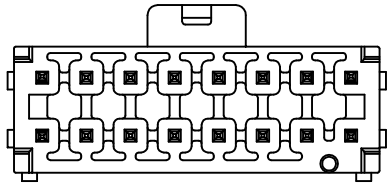

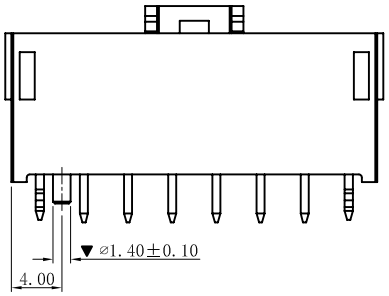

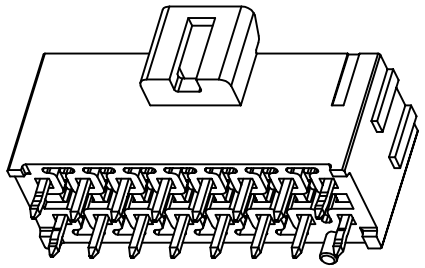

SPECIFICATIONS

- Voltage rating: 400V AC, DC
- Current rating: 14A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 15mΩ max

WAFER

- Part No.: W3501VD-2xNP-XX-TS
- Poles : 04-16P
- Housing Material: LCP UL94V-0,Black or Natural
- Pin Material: Brass
- Contact Area Plating: Tin or Gold-Plated
- The Dimension Marked "▼" Must Be Recorded

Part No.:
W3501VD-2xNP-X X-TS
- None: Tin-Plated
- G: Gold-Flash
- G15: 15u" Gold
- G30: 30u" Gold

X
- A: A Key, Black
- B: B Key, Natural

Poles	Dim.A	Dim.B
4	3.50	8.00
6	7.00	11.50
8	10.50	15.00
10	14.00	18.50
12	17.50	22.00
14	21.00	25.50
16	24.50	29.00
24	38.50	43.00

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
A	新版本	2019-10-08	PH.Duan

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-10-08

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection	
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/2
版本/Rev	A

品 名 (PART NEME)	3.50mm DIP 180° Wafer 带柱 Connector Series	
料 号 (PART NO)	W3501VD-2xNP-XX-TS	状态码 C