




ROHS

C	Color	Wire size
N	Natural	#18
R	Red	#22
Y	Yellow	#20
O	Orange	#18
W	White	#24

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 2200V AC/minute
  - Insulation resistance: 500MΩ min
  - Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : F3963-NP-C
- Poles : 02-24P
- Housing Material : PA66 UL94V-2
- Terminal Material : Phosphor bronze, Tin-Plated
- Applicable wire:AWG#18~#24

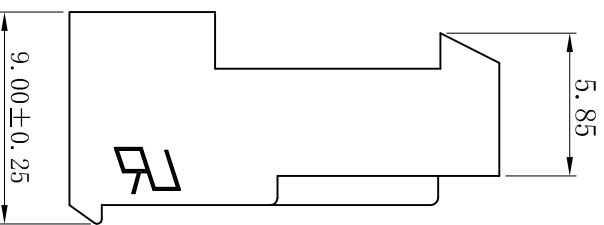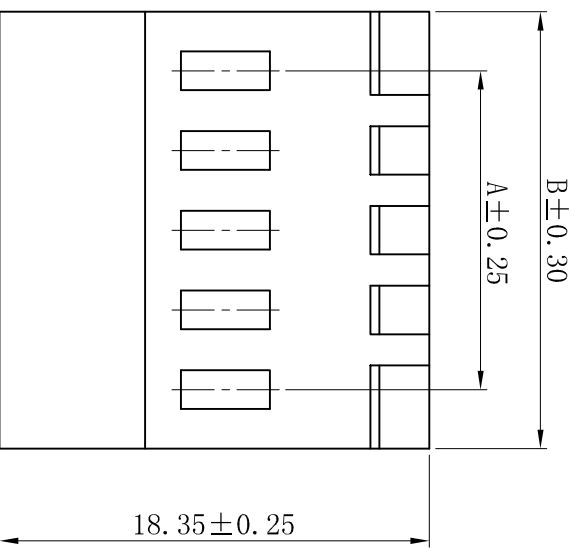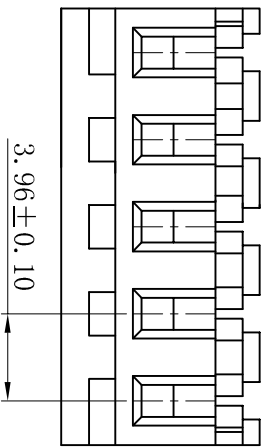

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	3.96	7.92	14	51.48	55.44
03	7.92	11.88	15	55.44	59.40
04	11.88	15.84	16	59.40	63.36
05	15.84	19.80	17	63.36	67.32
06	19.80	23.76	18	67.32	71.28
07	23.76	27.72	19	71.28	75.24
08	27.72	31.68	20	75.24	79.20
09	31.68	35.64	21	79.20	83.16
10	35.64	39.60	22	83.16	87.12
11	39.60	43.56	23	87.12	91.08
12	43.56	47.52	24	91.08	95.04
13	47.52	51.48			

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE	承认 APPRO.

投影法 Projection	第一角投影	品名 (PART NAME)	IDC 3.96mm 刺破式 Housing	料号 (PART NO)	F3963-NP-C	状态码	C
单位 Unit	MM	大小/SIZE	1:1				
页码/SHEET	1/1	版本/Rev	D				

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE	承认 APPRO.