

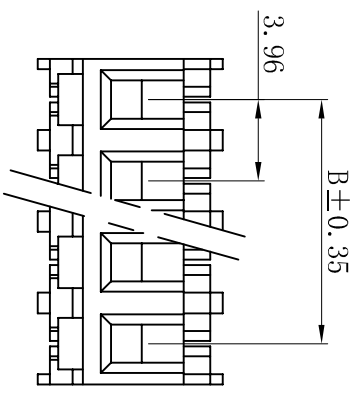
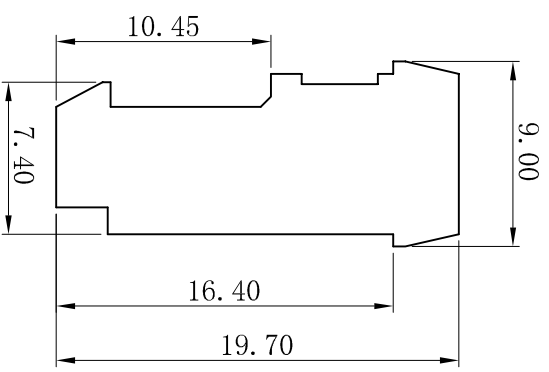


ROHS

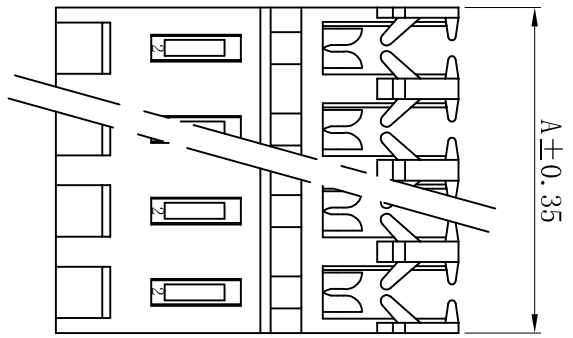

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 2200V AC/minute
 - Insulation resistance: 5000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING
- Part No.: F3963A-NP
 - Poles : 02-20P
 - Housing Material: PA66 UL94V-2
 - Terminal Material: Brass, Tin-Plated

Poles	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
#22	63.36	67.32
18	67.32	71.28
19	71.28	75.24
#18	75.24	79.20

Wire size C (± 0.03)	
#24	0.35mm
#22	0.50mm
#20	0.66mm
#18	0.85mm

更新图面		2019-06-03	陈雄军	更新图面
修打版本		2015-11-04	陈雄军	修打版本
变更图宽格式内容		2013-12-27	陈雄军	变更图宽格式内容
新版本		2011-05-24	陈雄军	新版本
说明		日期	承认	说明
DESCRIPTION		DATE	APPRO.	DESCRIPTION

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法
 Projection: MM

单位 Unit: MM
 比例/Scale: 1:1
 大小/Size: A4
 页码/Sheet: 1/1
 版本/Rev: D

品名 (PART NAME): IDC 3.96mm 刺破式 Housing
 料号 (PART NO): F3963A-NP

状态码: C