



RoHS


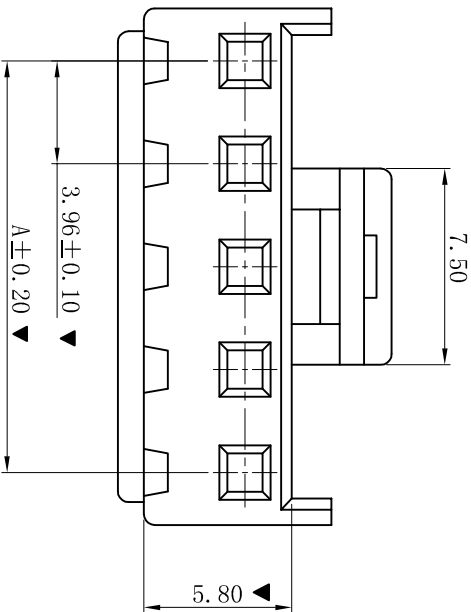


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H3961-NP-J
- Poles : 02-16P
- Housing Material : PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

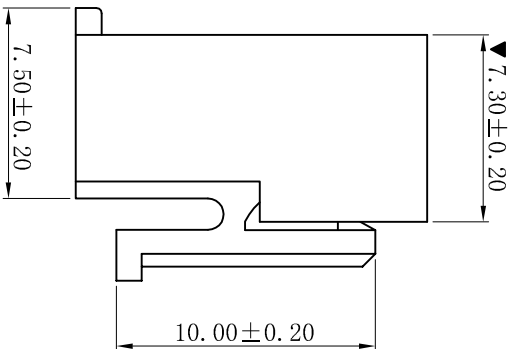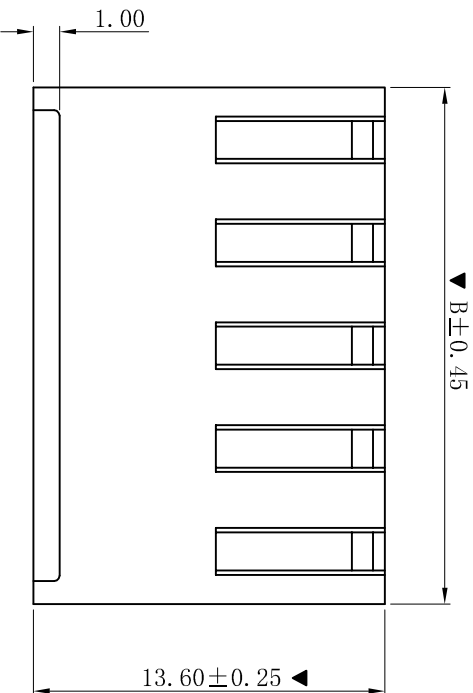

G

D		更新图面		2019-06-03	陈雄军				
C		修订版本		2015-11-04	陈雄军				
B		变更图宽格式内容		2013-12-27	陈雄军				
A		新版本		2011-05-24	陈雄军				
H		说明		日期	承认				
		REV.		DATE.	APPRO.				
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									

一般公差
GENERAL
TOLERANCE:

0±0.30
±0.25
±0.20
±0.05
ANGLE: ±1°

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	单位 Unit	品名 (PART NAME)	VH 3.96mm Housing Connector Series	料号 (PART NO)	H3961-NP-J	状态码	C
比例/Scale 1:1	MM						
页码/Sheet 1/1	A4						
版本/Rev D	1/1						

Poles

Poles	A	B
02	3.96	8.39
03	7.92	12.35
04	11.88	16.31
05	15.84	20.27
06	19.80	24.23
07	23.76	28.19
08	27.72	32.15
09	31.68	36.11
10	35.64	40.07
11	39.60	44.03
12	43.56	47.99
13	47.52	51.95
14	51.48	55.91
15	55.44	59.87
16	59.37	63.83