

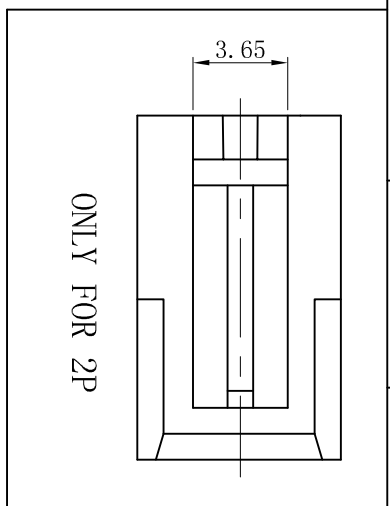
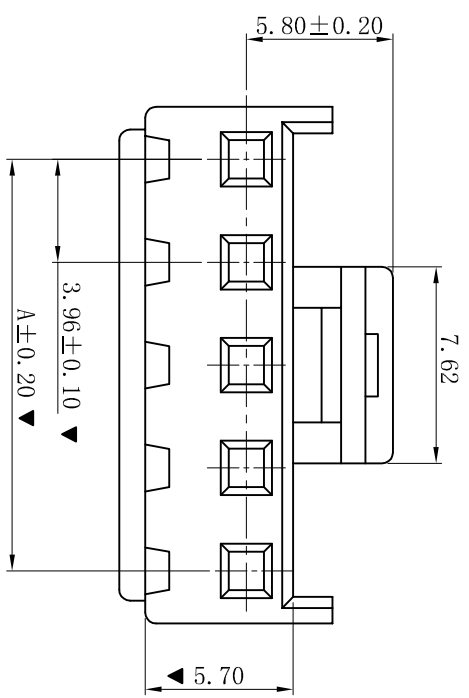
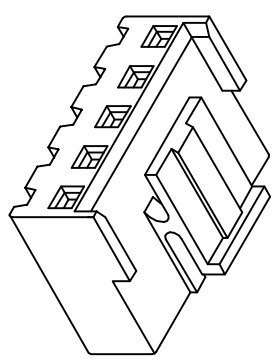


RoHS

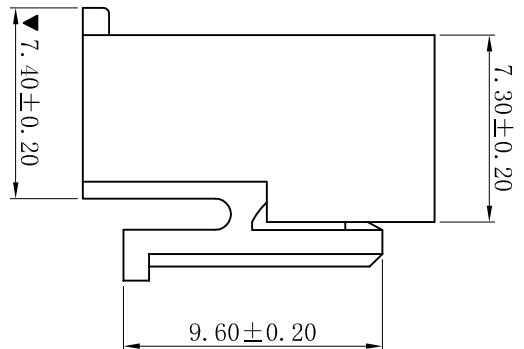

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance:1000M Ω min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H3961-NP-L
 - Poles : 02-16P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

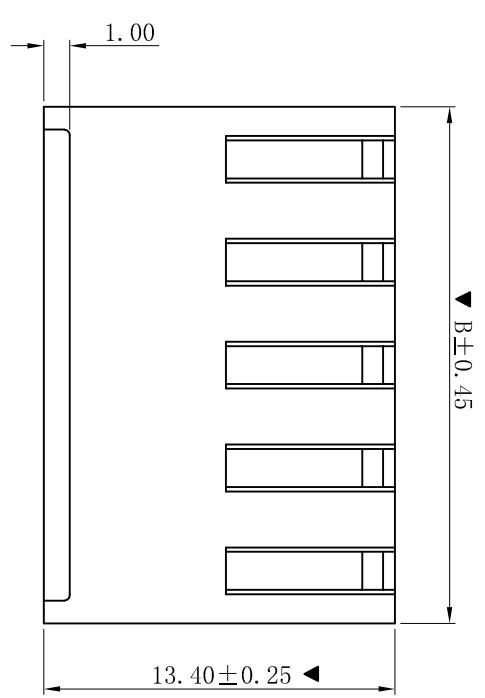

Poles	Dimensions(mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

G						XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO.,Ltd		品 名 (PART NAME) VH 3.96mm Housing Connector Series	料 号 (PART NO) H3961-NP-L	状态码 C
	D		更新图面	2019-06-03	陈雄军					
	C		修订版本	2015-11-04	陈雄军					
	B		变更图宽格式内容	2013-12-27	陈雄军					
H	A		新版本	2011-05-24	陈雄军	单位 Unit	MM			
					审核/CHECK	比例/Scale	1:1			
					核准/APPRO	页码/SHEET	A4 1/1			
	版次 REV.		说明 DESCRIPTION	日期 DATE.	承认 APPRO.	日期/DATE				
	1	2	3	4	5	6	7	8	9	10