



RoHS

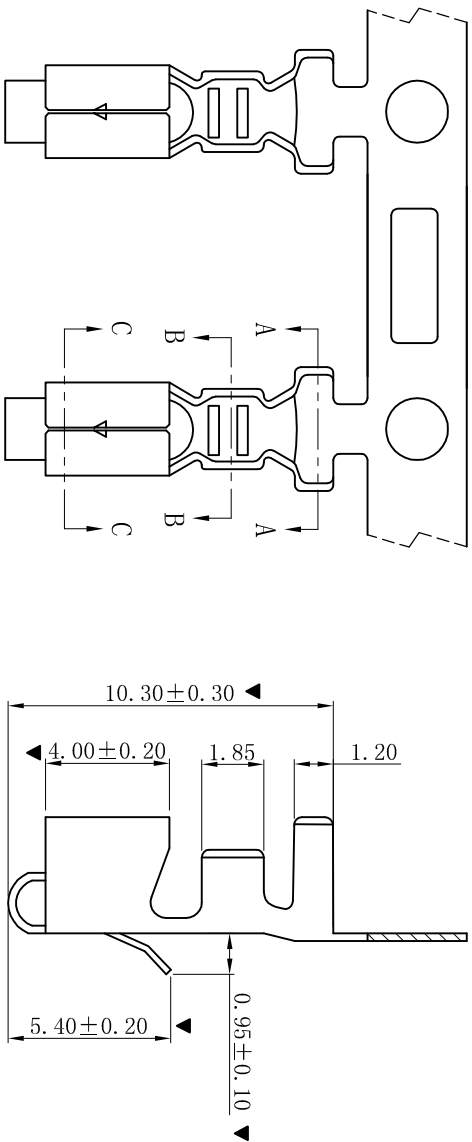

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

- TERMINAL
- Part No.: T3961PT-J
 - Applicable wire: AWG#18-#22
 - Material: Phosphor Bronze
 - Finish: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

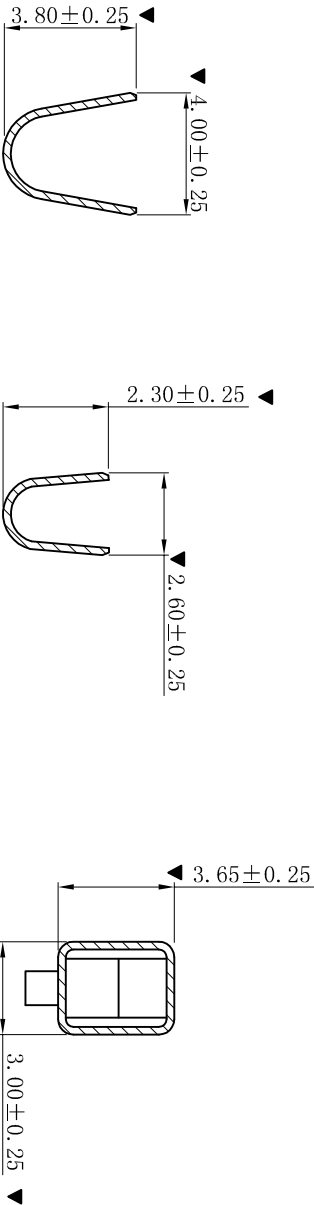

SECTION: A-A

SECTION: B-B

SECTION: C-C

					—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO.,Ltd	投影法 单位 Unit 比例/Scale 大小/Size 页码/SHEET 版本/Rev 	品 名 (PART NAME) VH 3.96mm Terminal Connector Series	料 号 (PART NO) T3961PT-J	状态码 C
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
D	更新图面	2019-06-03	陈雄军	—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
C	修订版本	2015-11-04	陈雄军	—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
B	变更图宽格式内容	2013-12-27	陈雄军	—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
A	新版本	2011-05-24	陈雄军	—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						
				—般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05						

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO.,Ltd