


ROHS


31.68±0.30

缺第4、7PIN

Circuit 1

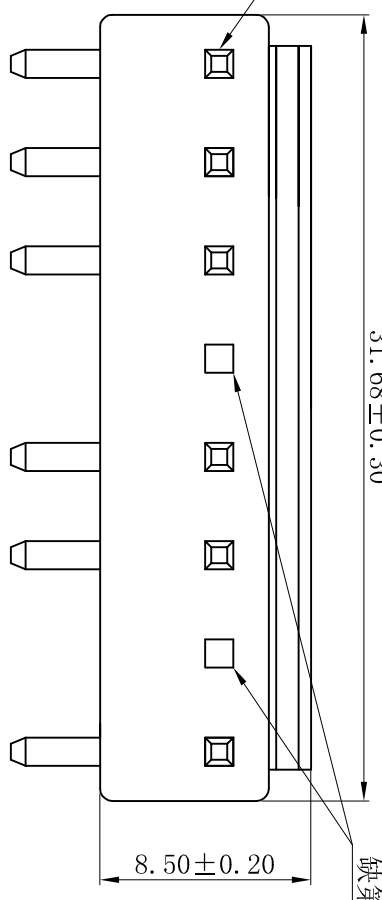

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W3961R-08P-Q2P
 - Poles : 08P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

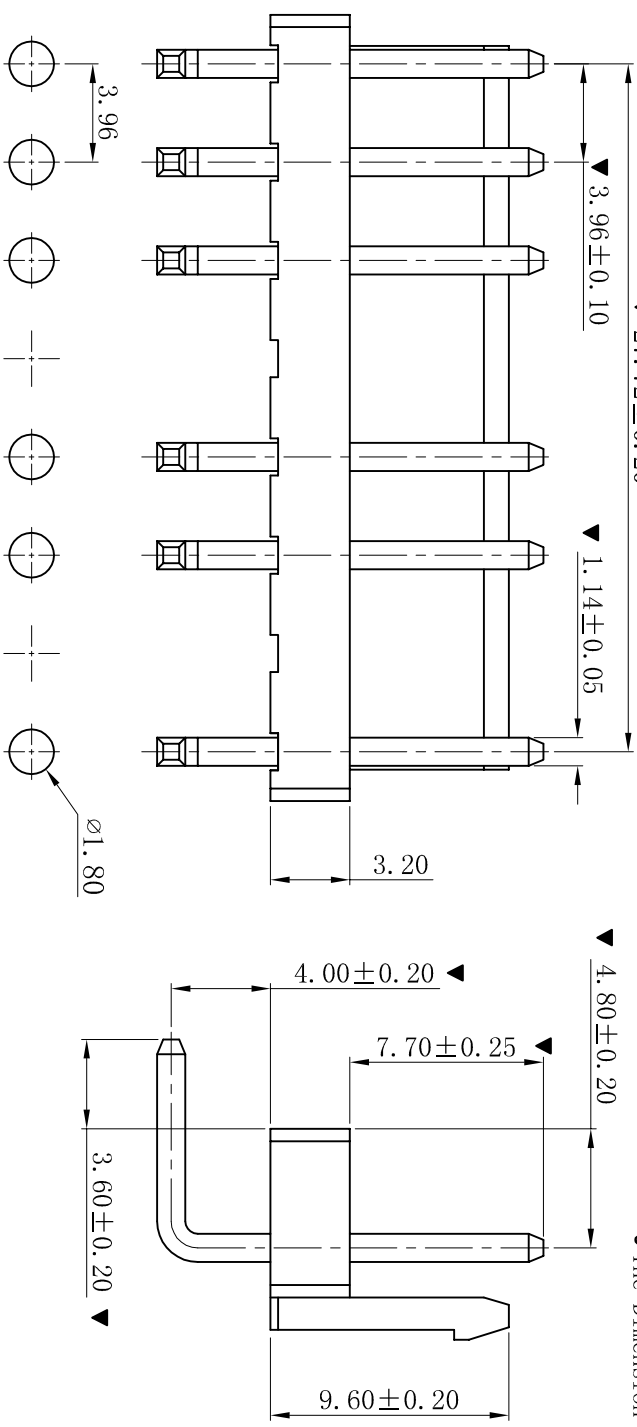

P.C.B. LAYOUT

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		VH 3.96mm 90° 8P Wafer	
修订版本		2015-11-04		陈雄军		绘图/DR		陈雄军		单位 Unit		(PART NAME)		Connector Series	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		比例/Scale		(PART NAME)		VH 3.96mm 90° 8P Wafer	
新版本		2011-05-24		陈雄军		核准/APPRO		胡进		大小/SIZE		(PART NO)		W3961R-08P-Q2P	
说明		日期		承认		日期/DATE		2019-06-03		页码/SHEET		(PART NO)		W3961R-08P-Q2P	
版次		REV.		1		1		D		版本/Rev		料号		W3961R-08P-Q2P	
DESCRIPTION		1		2		3		4		5		6		7	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

状态码

C