

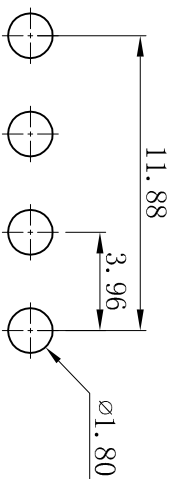
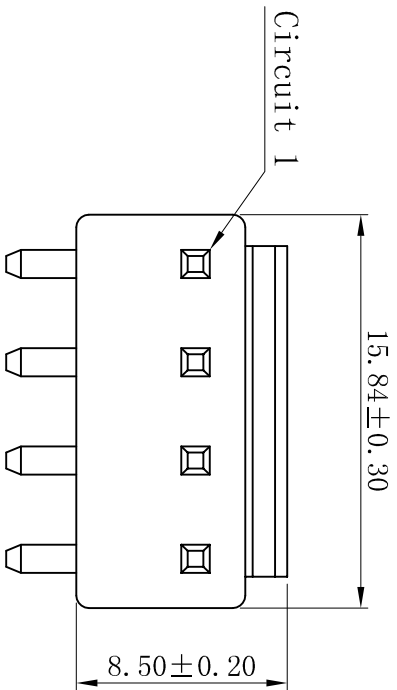


RoHS

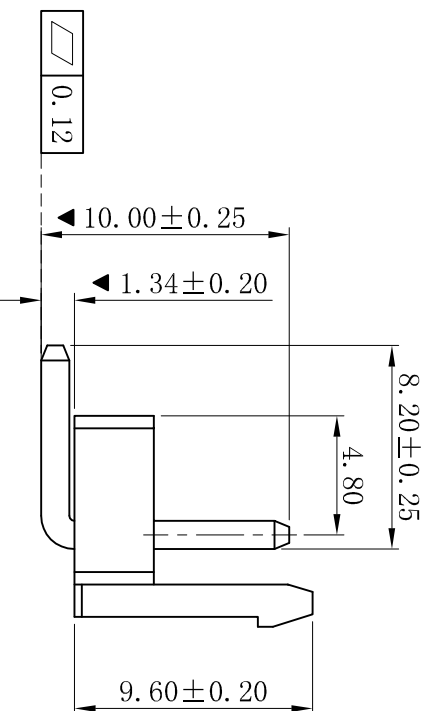

P. C. B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : W3961V-04P-DW-9TBK
 - Poles : 04P
 - Housing Material: PA9T UL94V-0, Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

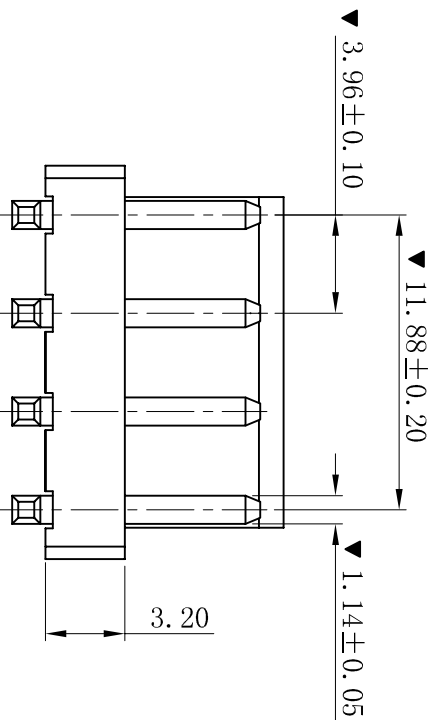

一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	ANGLE: ±1 $^{\circ}$	
绘图/DR	审核/CHECK	陈雄军	日期/DATE	2019-06-03
批准/APPRO	胡进			

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

VH 3.96mm 90 $^{\circ}$ Wafer
Connector Series

品名 (PART NAME)	料号 (PART NO)	状态码
W3961V-04P-DW-9TBK	C	

版本号 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
A	新版本	2019-06-22	胡进

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----