

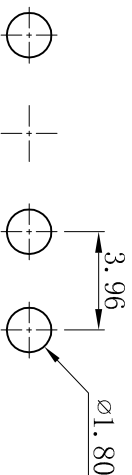


RoHS

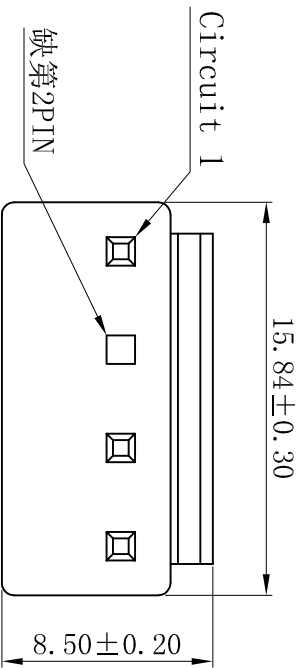

P.C.B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C⁺85° C
- Contact resistance: 20mΩ max
- WAFER
- Part No.: W3961V-04P-K02
- Poles : 04P
- Housing Material: PA66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

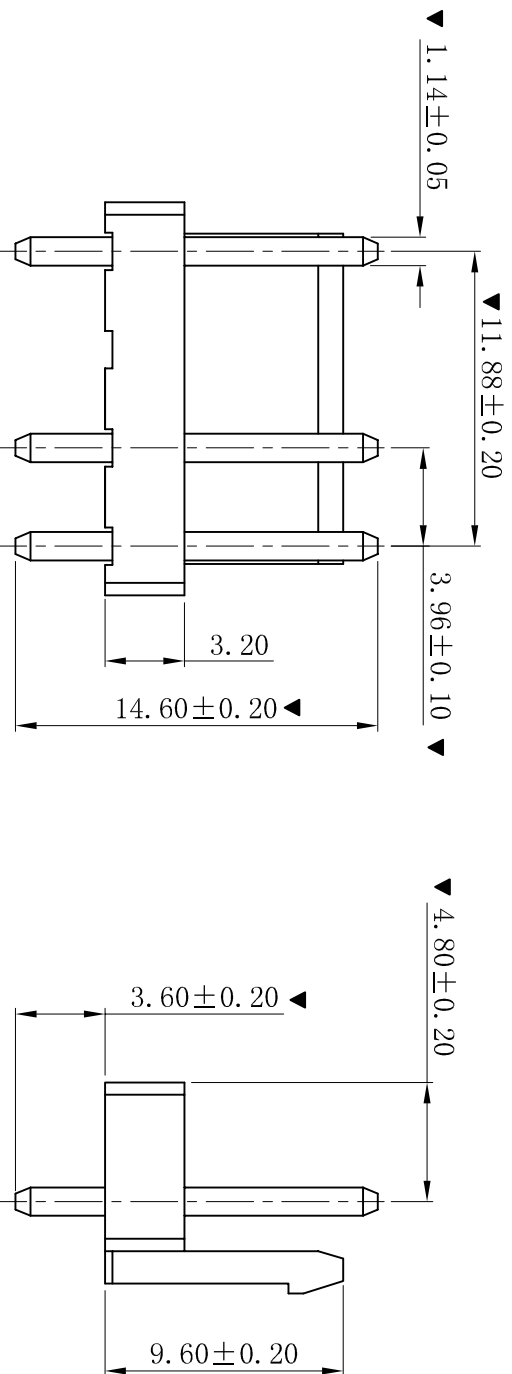

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) VH 3.96mm 180° 4P Wafer Connector Series	
修订版本		2015-11-04		陈雄军		绘图/DR		审核/CHKC		料号 (PART NO.) W3961V-04P-K02	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHKC		核推/APPRO		状态码 C	
新版本		2011-05-24		陈雄军		核推/APPRO		日期/DATE		页码/SHEET 1/1	
说明		2019-06-03		承认		日期/DATE		版本/Rev		D	
版次		DESCRPTION		说明		日期/DATE		承认		状态码	
REV.		1		3		4		5		6	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd