
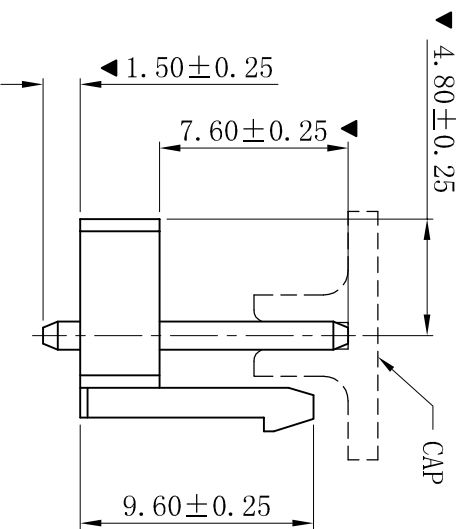
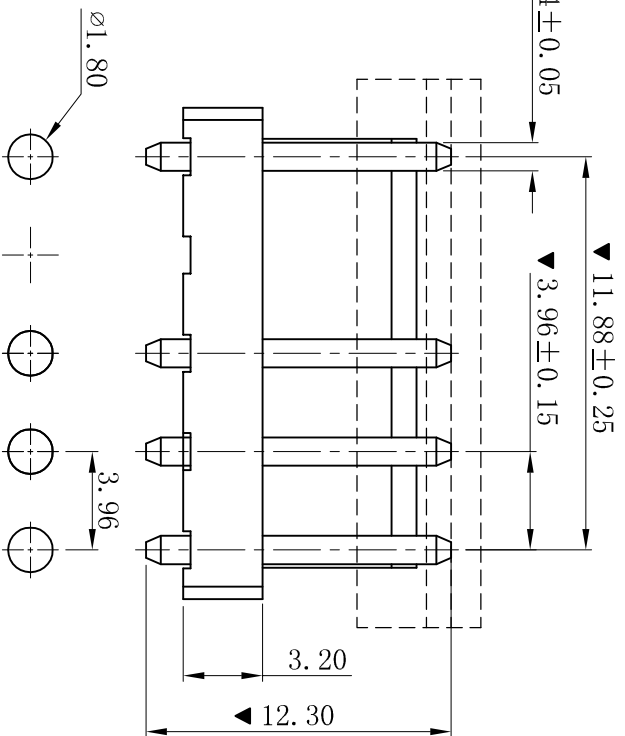


RoHS

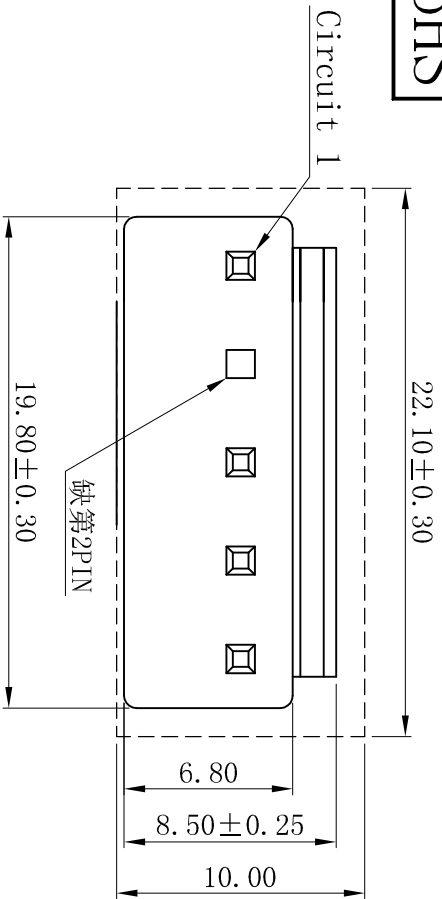

P.C.B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W3961V-05P-46-WL1.5-K02
 - Poles : 05P
 - Housing Material: PA46 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-plated
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE.
1	1	2	3

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
投影法 Projection	品名 (PART NAME)
单位 Unit MM	VH 3.96mm 180° 5P Wafer
比例/Scale 1:1	Connector Series
大小/Size A4	料号 (PART NO)
页码/Sheet 1/1	W3961V-05P-46-WL1.5-K02
版本/Rev D	状态码 C