

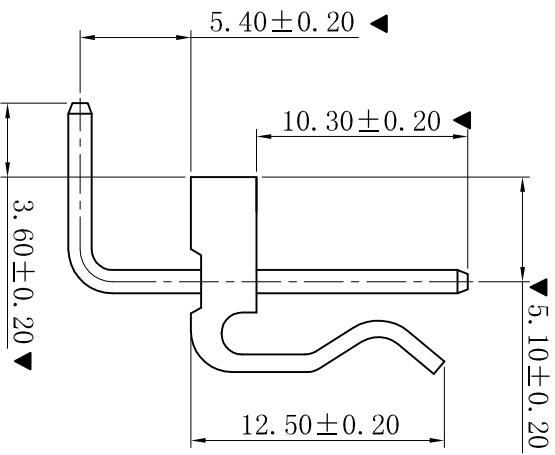
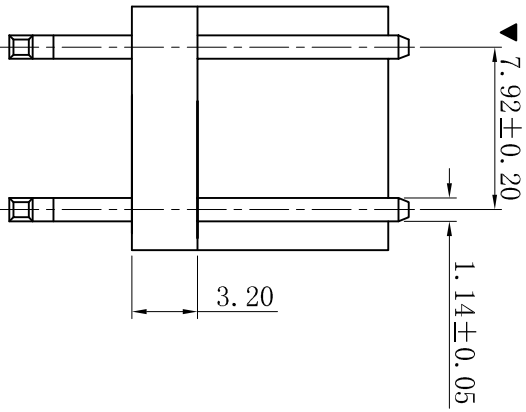


RoHS

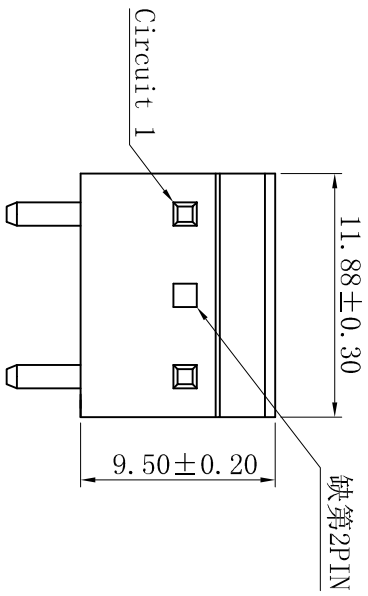

P. C. B. LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W3962R-03P-K02
- Housing Material: PA66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05 ANGLE: ±1°		投影法 Projection MM		品名 (PART NAME) Molex 3.96mm 90° Wafer Connector Series		料号 (PART NO) W3962R-03P-K02		状态码 C
修订版本		2015-11-04	陈雄军		绘图/DR 陈雄军		单位 Unit MM		审核/CHKC 陈雄军		大小/SIZE A4		
变更图宽格式内容		2013-12-27	陈雄军		审核/CHKC 陈雄军		比例/Scale 1:1		核准/APPRO 胡进		页码/SHEET 1/1		
新版本		2011-05-24	陈雄军		日期/DATE 2019-06-03		版本/Rev D		说明 DESCRIPTION				
版次 REV.		1											

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd