RoHS

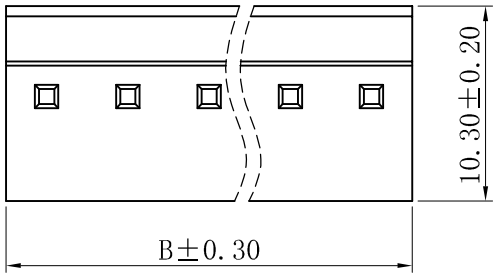

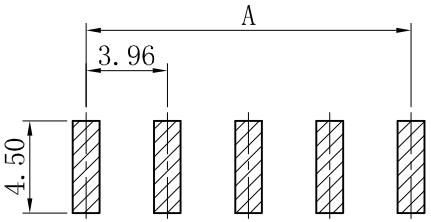

P.C.B. LAYOUT

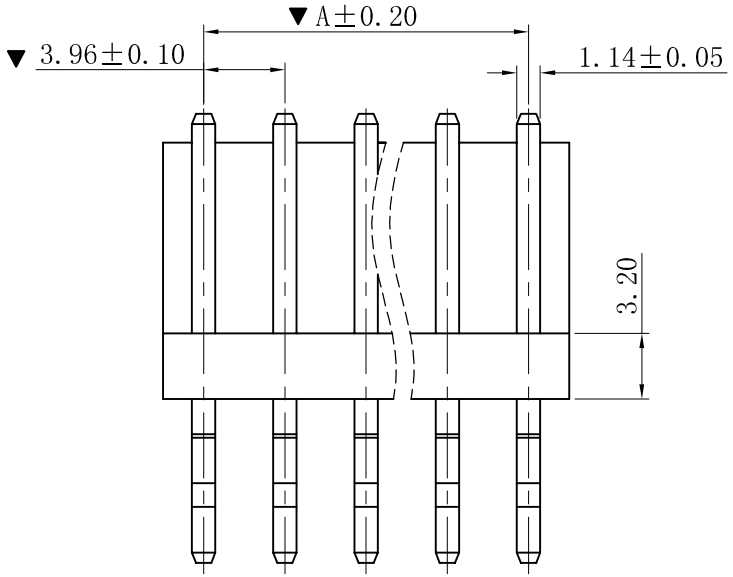

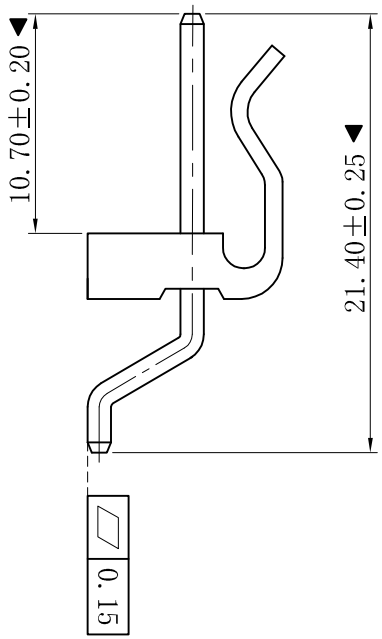

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3962SR-NP
- Poles : 02-25P
- Housing Material: PA66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	3.96	7.92	16	59.40	63.36
03	7.92	11.88	17	63.36	67.32
04	11.88	15.84	18	67.32	71.28
05	15.84	19.80	19	71.28	75.24
06	19.80	23.76	20	75.24	79.20
07	23.76	27.72	21	79.20	83.16
08	27.72	31.68	22	83.16	87.12
09	31.68	35.64	23	87.12	91.08
10	35.64	39.60	24	91.08	95.04
11	39.60	43.56	25	95.04	99.00
12	43.56	47.52			
13	47.52	51.48			
14	51.48	55.44			
15	55.44	59.40			

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
B	更新图面	2019-06-03	PH.Duan
A	新版本	2017-11-01	Jeff

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	Molex 3.96mm SMT 90° Wafer Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W3962SR-NP
页码/SHEET	1/1		状态码 C
版本/Rev	B		