
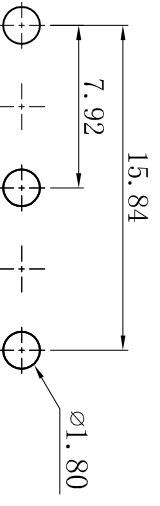
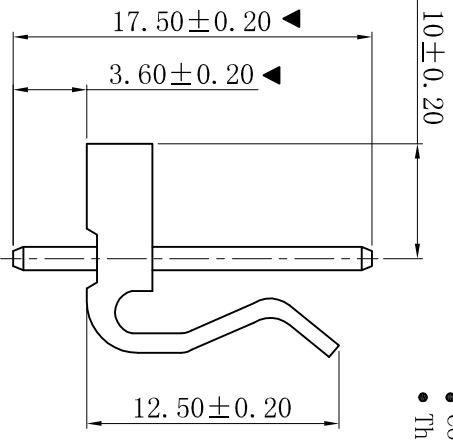
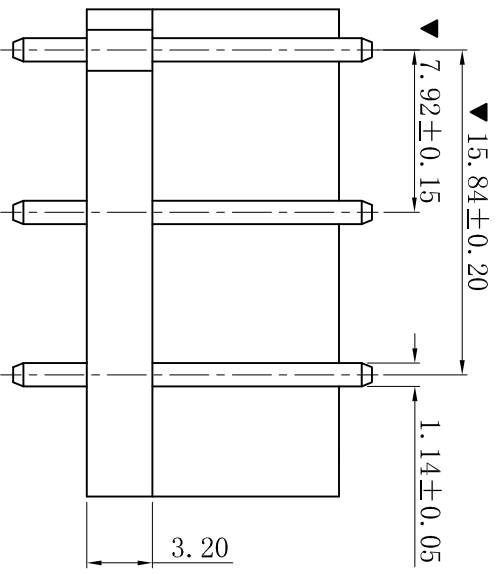


ROHS

缺第2、4、6PIN

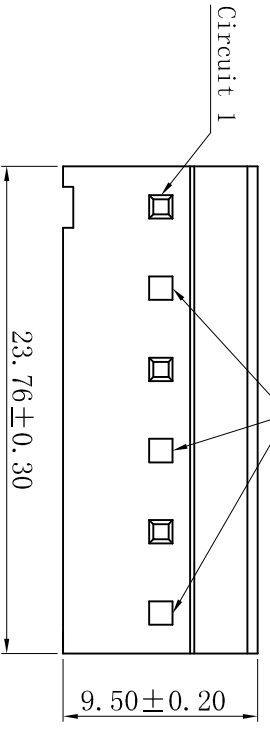

P.C.B. LAYOUT

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C ~ +85° C
  - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W3962V-06P-Q3P
  - Housing Material: PA66 UL94V-2
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差	0±0.30	<b>XYDZ® 东莞市祥运连接器有限公司</b> Dongguan XiangYun Connectors CO., Ltd	投影法 	品名 (PART NAME) Molex 3.96mm 180° Wafer Connector Series	料号 (PART NO) W3962V-06P-Q3P	状态码 C
修订版本		2015-11-04	陈雄军	GENERAL TOLERANCE:	.00±0.25 .000±0.05					
变更图宽格式内容		2013-12-27	陈雄军	绘图/DR	ANGLE: ±1°	审核/CHK	陈雄军	大小/SIZE	A4	页码/SHEET 1/1
新版本		2011-05-24	陈雄军	核准/APPRO	胡进	日期/DATE	2019-06-03	版本/Rev	D	
说明		日期	承认							
DESCRPTION		DATE	APPRO.							

更新图面		2019-06-03	陈雄军							
修订版本		2015-11-04	陈雄军							
变更图宽格式内容		2013-12-27	陈雄军							
新版本		2011-05-24	陈雄军							
说明		日期	承认							
DESCRPTION		DATE	APPRO.							