
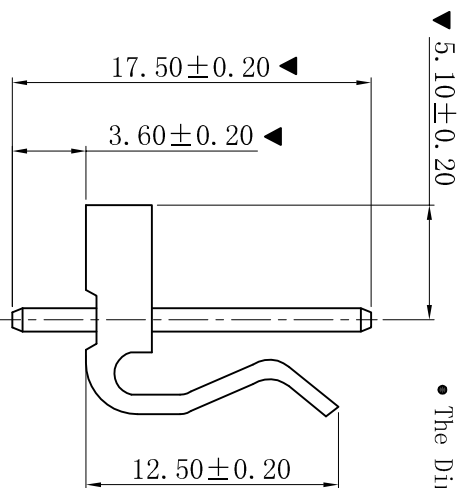
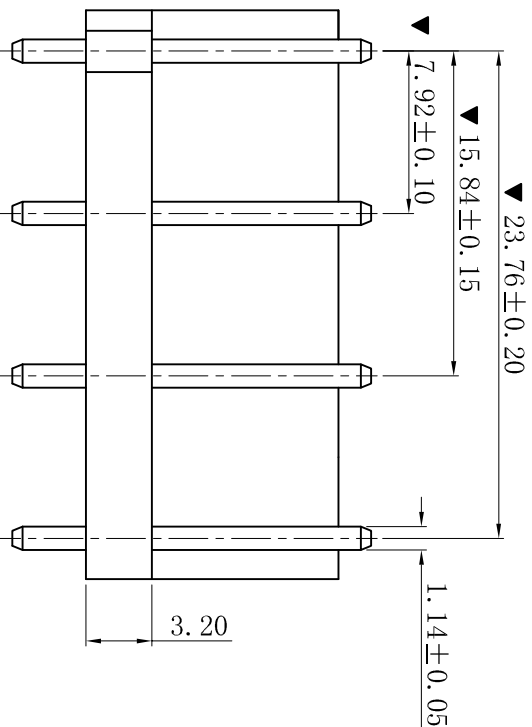



ROHS

缺第2、4、6PIN

Circuit 1

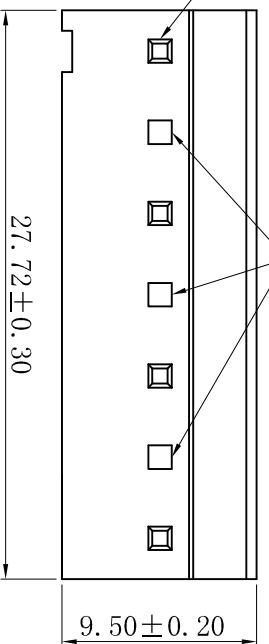

P.C.B. LAYOUT

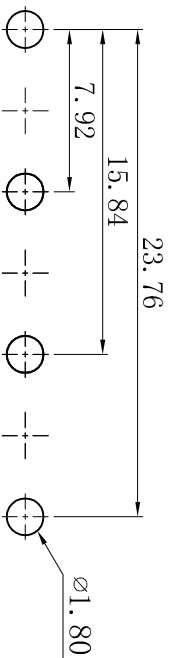

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3962V-07P-Q3P
- Housing Material: PA66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03		陈雄军		P.C.B. LAYOUT		0±0.30		XYDZ® 东莞市祥运连接器有限公司		品名		Molex 3.96mm 180° Wafer	
修订版本		2015-11-04		陈雄军		一般公差		.0±0.25		Connectors		(PART NAME)		Connector Series	
变更图宽格式内容		2013-12-27		陈雄军		GENERAL TOLERANCE:		.00±0.20		投影法		料号		W3962V-07P-Q3P	
新版本		2011-05-24		陈雄军		ANGLE: ±1°		.000±0.05		Connector's CO., Ltd		状态码		C	
说明		日期		承认		绘图/DR		.000±0.05		Dongguan XiangYun Connector's CO., Ltd		料号		W3962V-07P-Q3P	
DESCRPTION		DATE:		APPRO.		审核/CHCK		.000±0.05		Dongguan XiangYun Connector's CO., Ltd		料号		W3962V-07P-Q3P	
1		2		3		4		5		6		7		8	
1		2		3		4		5		6		7		8	