
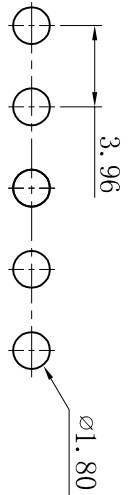
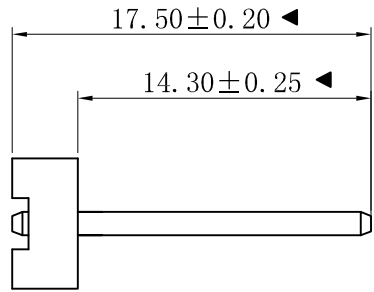
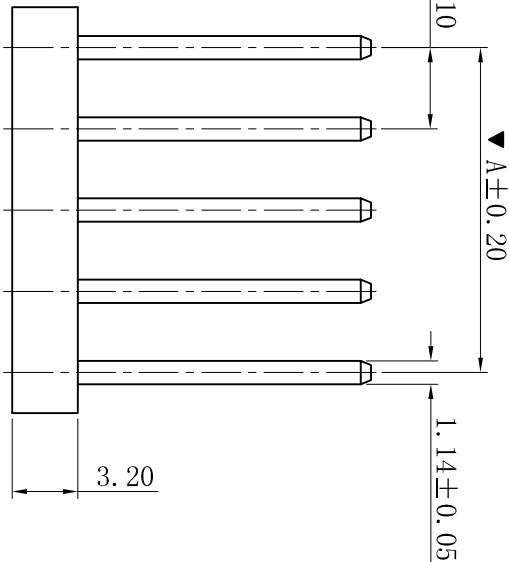


RoHS

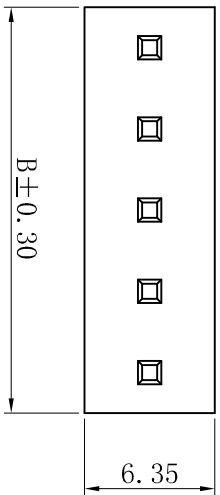

P.C.B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W3962WKBV-NP-S14.3
 - Poles : 02-20P
 - Housing Material: PA66 UL94V-2
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

A	1	2	3	4	5	6	7	8	9	10
B										
C										
D										
E										
F										
G										

H	D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO., Ltd		投影法 Projection	品名 (PART NAME)	Molex 3.96mm 180° 无靠背 Wafer Connector Series	料号 (PART NO)	W3962WKBV-NP-S14.3	状态码 C					
	C	修订版本	2015-11-04	陈雄军	绘图/DR		ANGLE: ±1°	审核/CHKC		陈雄军	单位 Unit	MM	比例/Scale	1:1	大小/Size	A4	页码/Sheet	1/1	版本/Rev	D
H	B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHKC		陈雄军	日期/DATE		2019-06-03	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	
H	A	新版本	2011-05-24	陈雄军	审核/CHKC		陈雄军	日期/DATE		2019-06-03	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	
H	1	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进	日期/DATE	2019-06-03	胡进