
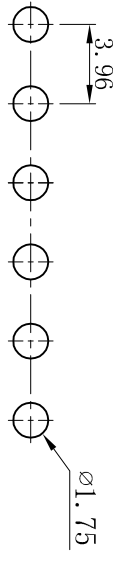
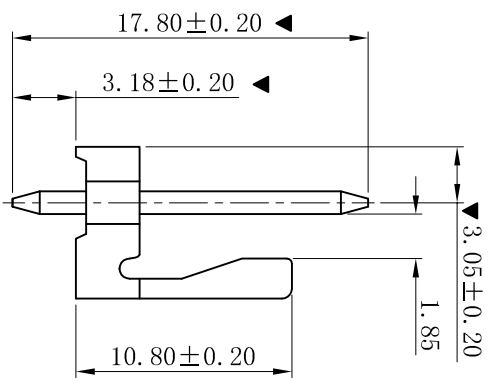
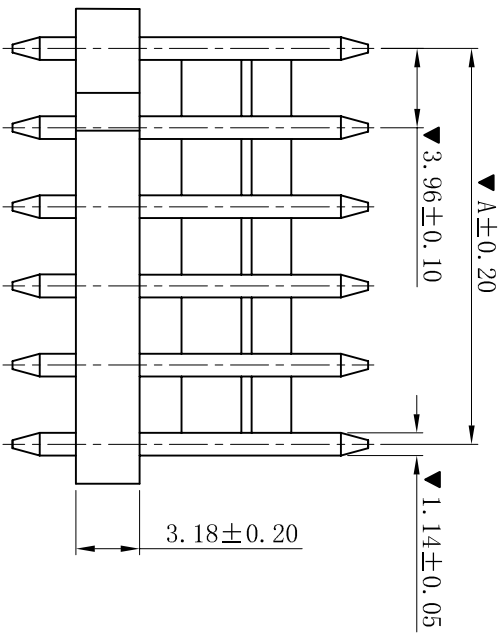


RoHS

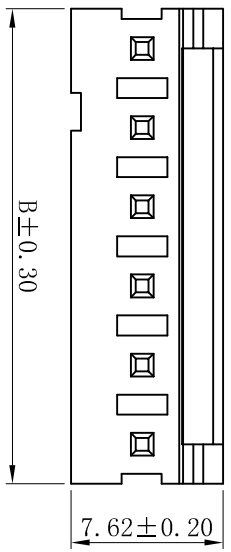

P. C. B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C +85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W3963V-NP
  - Poles : 02-20P
  - Housing Material: PA66 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) 3.96mm 180° Wafer Connector Series		料号 (PART NO) W3963V-NP		状态码 C
修打版本		2015-11-04	陈雄军	绘图/DR		陈雄军		东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd				
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK		胡进						
新版本		2011-05-24	陈雄军	批准/APPRO		胡进						
说明		日期	承认	日期/DATE		2019-06-03						
DESCRPTION		DATE	APPRO.									
版次												
REV.												