
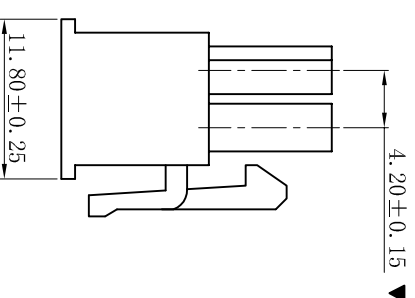
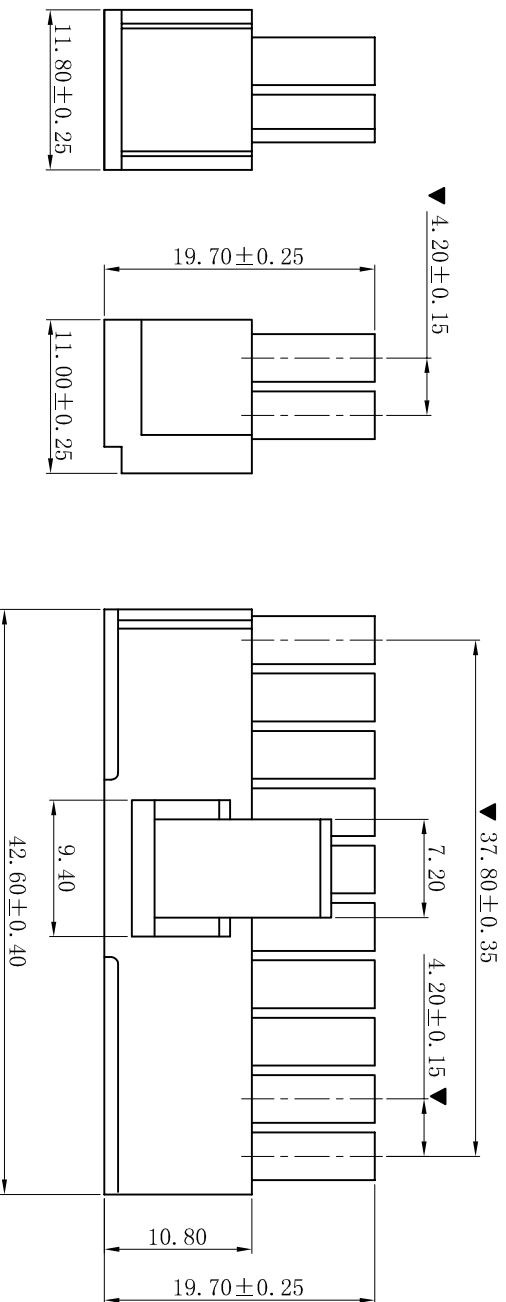


RoHS

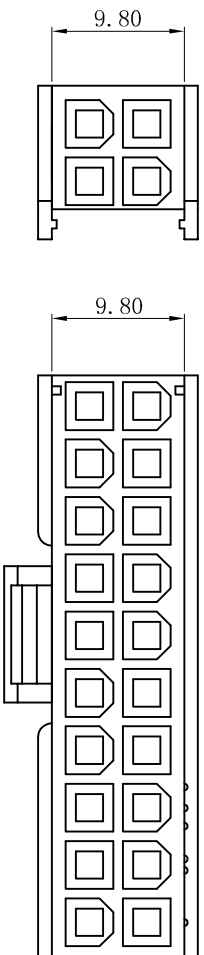

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H4201-20+4-BK
- Poles: 24P
- Housing Material: PA66 UL94V-2 Black
- Mates With: H4202 dual row receptacle
- Use With: T4202 Terminals
- The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05	绘图/DR	陈雄军	审核/CHECK	陈雄军	日期/DATE	2019-07-03
C	修订版本	2015-11-04	陈雄军	ANGLE: ±1°		审核/CHK	陈雄军	批准/APPRO	胡进	日期/DATE	2019-07-03
B	变更图宽格式内容	2013-12-27	陈雄军			日期/DATE	2011-05-24	承认	陈雄军	日期	2011-05-24
A	新版本					说明		承认	陈雄军	日期	2011-05-24
H	版次 REV.					说明		承认	陈雄军	日期	2011-05-24
						说明		承认	陈雄军	日期	2011-05-24

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
第一角法 1st Angle	Molex 4-20mm 20+4组合式 Male Housing Connector Series	H4201-20+4-BK	C
单位 Unit	大小/Scale	页码/SHEET	版本/Rev
MM	1:1	1/1	D