



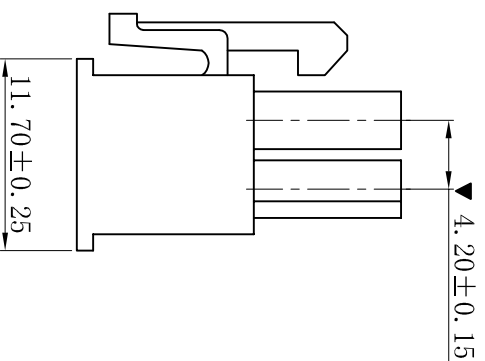
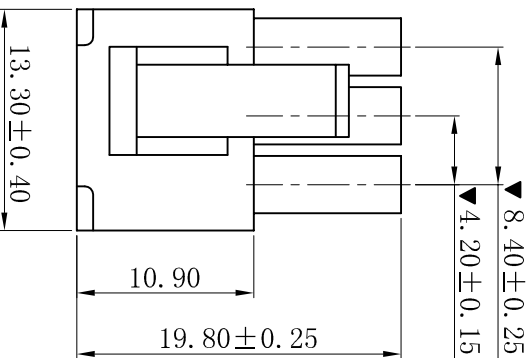


RoHS

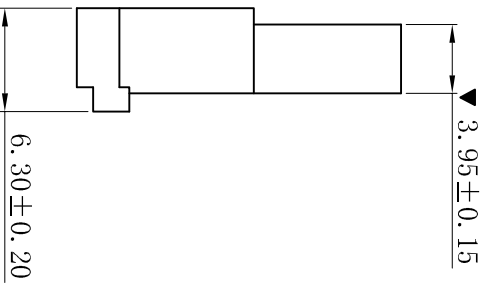

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H4201K-6+2-BK
 - Poles: 08P
 - Housing Material: PA66 UL94V-2 Black
 - Mates With: H4202 dual row receptacle
 - Use With: T4202 Terminal
 - The Dimension Marked “▼” Must Be Recorded

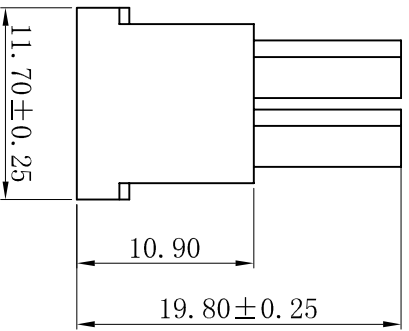

更新图面		2019-07-03		陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd		品名 (PART NAME) Molex 4.20mm 6+2卡式组合 Male Housing Connector Series	
修訂版本		2015-11-04		陈雄军		绘图/DR 陈雄军		投影法 第一角法		料号 (PART NO) H4201K-6+2-BK	
变更图览格式内容		2013-12-27		陈雄军		审核/CHKC 陈雄军		单位 Unit MM		状态码 C	
新版本		2011-05-24		陈雄军		批准/APPRO 胡进		比例/Scale 1:1			
说明		日期		承认		日期/DATE 2019-07-03		大小/Size A4			
DESCRPTION		DATE		APPRO		页码/SHEET 1/1		版本/Rev D			
版次											
REV.											