


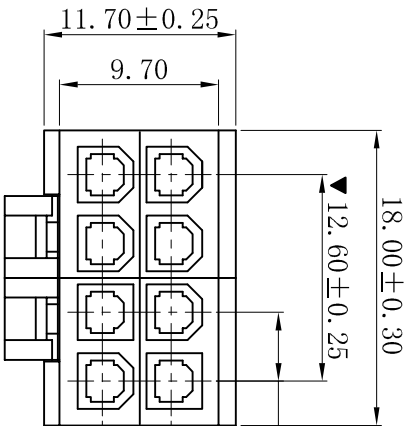



ROHS

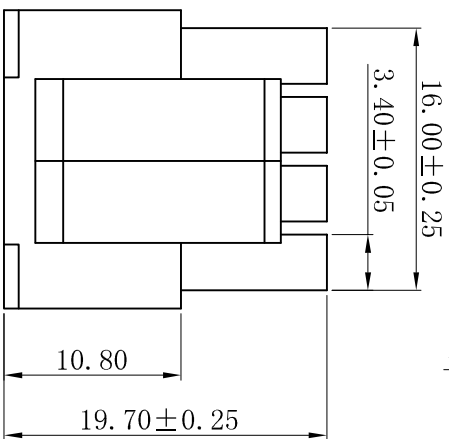

4.20±0.15

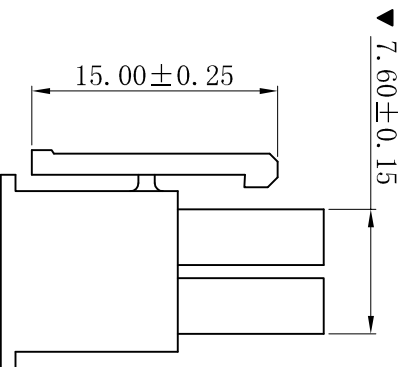

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H4201PM-4+4-BK
- Poles: 08P
- Housing Material: PA66 UL94V-2 Black
- Mates With: H4202 dual row receptacle
- Use With: T4202 Terminal
- The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-07-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司	
Connectors Dongguan XiangYun Connectors CO., Ltd	
投影法 Projection	第一角投影法
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

品名 (PART NAME)	Male Housing Connector Series
料号 (PART NO)	H4201PM-4+4-BK
状态码	C

1	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
2				
3				
4				
5				

6	日期/DATE	2019-07-03
7	审核/CHECK	陈雄军
8	批准/APPRO	胡进
9	日期/DATE	2019-07-03
10	日期/DATE	2019-07-03

1	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
2				
3				
4				
5				