
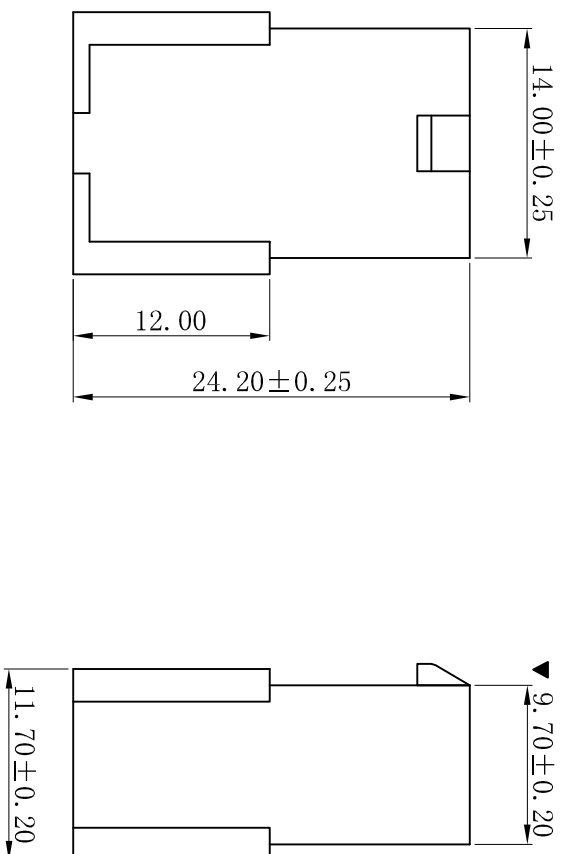


RoHS

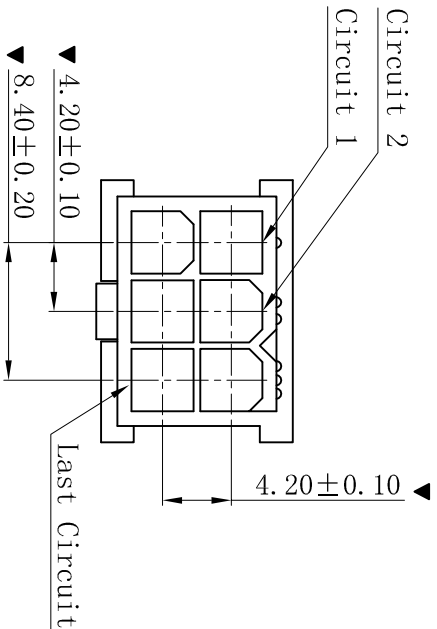

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H4202N-2x03P-HF-BK-ZL
- Poles: 06P
- Housing Material: PA66 UL94V-0 HF Black
- Mates With: H4201 dual row receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▼” Must Be Recorded

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
绘图/DR	PP, Duow
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

Connectors

投影法 Projection	单位 Unit	品名 (PART NAME)	Molex 4.20mm Female Housing Connector Series
MM	1:1	料号 (PART NO)	H4202N-2x03P-HF-BK-ZL
大小/SIZE	A4	状态码	C
页码/SHEET	1/1		
版本/Rev	B		

更新图面		2019-07-03	PP, Duow	承认	日期	2019-04-23	说明	新版本
版次		1	RRV.	DESCRIPTION	1	2	3	4