




RoHS

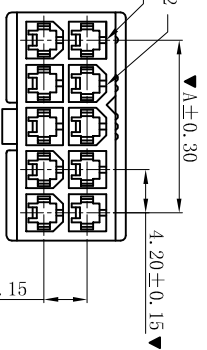





H4202NE-2xNP-X
 None: Pa66-V2 Natural
 BK: Pa66-V2 Black
 V0: Pa66-V0 Natural
 V0BK: Pa66-V0 Black

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25 °C +85 °C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H4202NE-2xNP-X
- Poles: 02-24P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4201 Dual Row Receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▼” Must Be Recorded

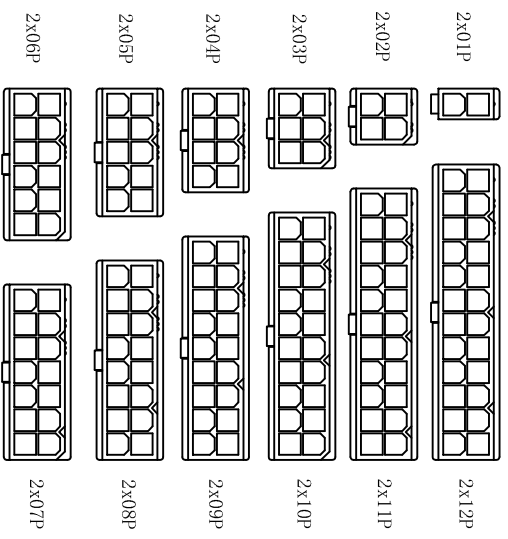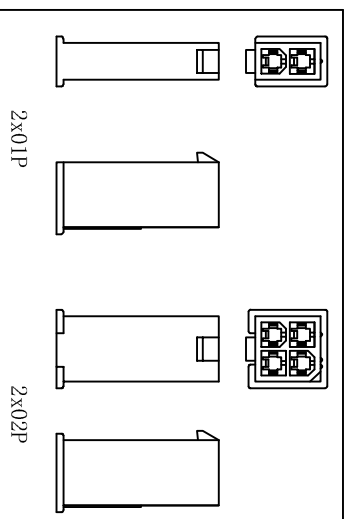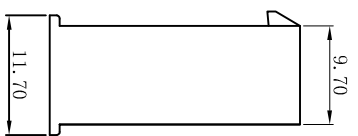

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

CIRCUIT SIZE LAYOUT

XYDZ® 东莞市祥运连接器有限公司
 Dongguan Xiangyun Connector s CO., Ltd

一般公差
 GENERAL TOLERANCE:
 0±0.30
 .0±0.25
 .00±0.20
 .000±0.05
 ANGLE: ±1°

投影法
 Projection
 单位
 Unit
 MM

比例/Scale
 1:1

大小/Size
 A4

页码/Sheet
 1/1

版本/Rev
 D

品名
 (PART NAME)
 Molex 4.20mm 特殊无翅膀 Female
 Housing Connector Series

料号
 (PART NO)
 H4202NE-2xNP-X

状态码
 C

绘图/DR
 审核/CHECK
 批准/APPRO
 日期/DATE

陈雄军
 陈雄军
 胡进
 2019-07-03

更新图面
 修订图面
 变更图宽格式内容
 新版本
 说明
 DESCRIPTION

2019-07-03
 2015-11-04
 2013-12-27
 2011-05-24

陈雄军
 陈雄军
 陈雄军
 承认

版次
 REV.

1 2 3 4 5 6 7 8 9 10