
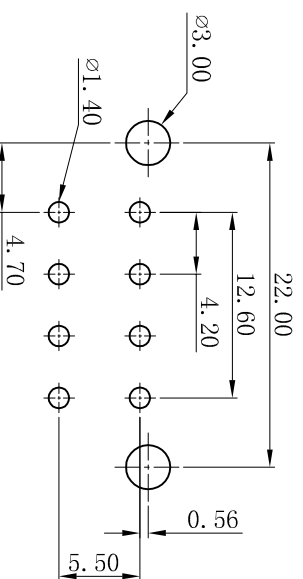
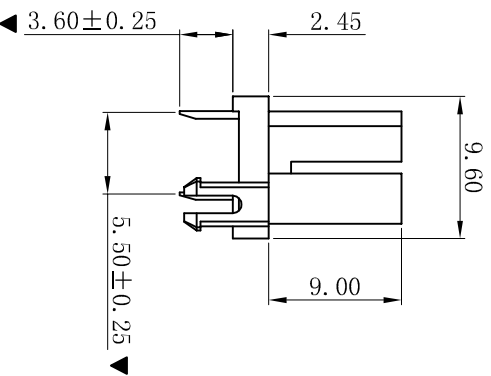
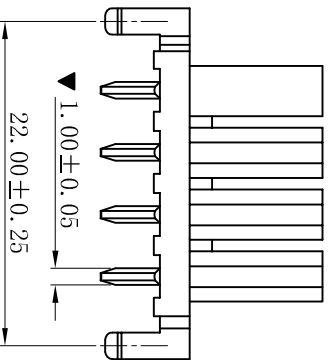


RoHS

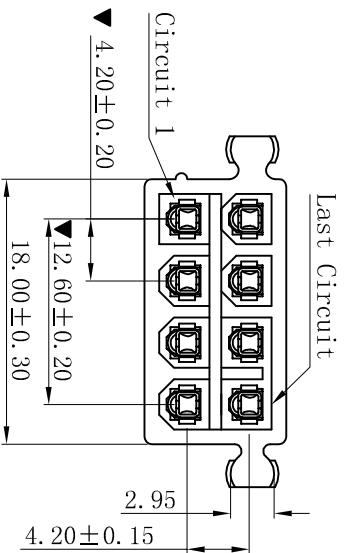

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20m Ω max
- WAFER**
- Part No. : W4201VTDLT-2x04P-SW
 - Poles: 08P
 - Housing Material: PA66 UL94V-0 COLOR NATURA
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Matte Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MMAX

B	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
版次 RRV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE:	±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D
品名 (PART NAME)	Molex 4.20mm 180° 公座带柱 七八连孔 Wafer Connector Series
料号 (PART NO)	W4201VTDLT-2x04P-SW
状态码	C